

LED Spot / Tracklight



TIS SPOT42/PDL100S

Application


Track light is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, museums, recreational centers, etc.

Specification

Housing	Die-cast Aluminium
Finishing	Powder Coated in Black
Mounting	1 Circuit track (SPOT42/LTS90, LTR90)
Power	14W
Light Source	LED-COB
Colour Temperature	2700/3000/4000/5000K
CRI	>80
Lamp Output	1425/1425/1526/1526 lm
Luminaire Output	1197/1197/1281/1281 lm
Beam Angle	20/30/45 Degree
Control Gear	Separate Driver
Dimming Method	0/1-10V ,Phase cut ,Push dim ,DALI*
Power Supply	42VDC
Power Factor	>0.9
Insulation Class	II
IP Rating	20
LED Lifetime	25,000 hrs.
Remarks	*Dimming use with SR-2303P(4 in 1) **For all Dimming method, all luminaires are dimmed at the same time

Ordering Data

Model	Watt
SPOT42/PDL100S/BK-14LED	14W

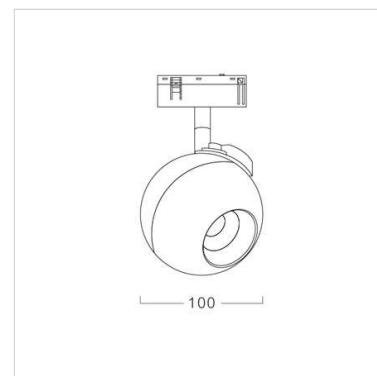

Related Products



SPOT42/PDL52-20W



SPOT42/PDL100L-8/14W