





Material	LED mounted on flexible PCB in silicone jacket
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 55°C
IP Rating	67, 68
CRI	≥ 80
Min.Cutting Unit	166.7mm
Max. Continuous Length	10m
Control Options	DMX
Address per meter	6
Weight (kg)	0.5 kg/m

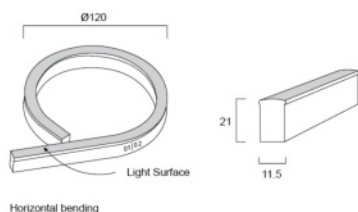


SLN260-HB

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	RGB (120lm/m)	120°	24Vdc
	Dynamic white 2200K-5700K (270lm/m)		
15W/m	2700K (250lm/m)		
	3000K (250lm/m)		
	3500K (250lm/m)		
	4000K (250lm/m)		
	5700K (250lm/m)		
	RGBW (200lm/m)		




Accessories


Injection-Moulded connector (E/S/B) + End cap



E = END



S = Side




B = Button



End Cap

Aluminium Profile

Serrated
Aluminium ProfileRecess Serrated
Aluminium ProfileBendable Serrated
Aluminium ProfileThickened
Plastic ProfileRaceway Serrated
Aluminium Profile