


TIS **SLN260/PIXEL**

Application

Facade lighting
Landscape Lighting
Solutions for retail shops
Signage and illuminated advertising
Ideal for architectural lighting

Specification

Housing	Silicone jacket
Dimension	11.5x1000x21mm.
Weight	0.5 kg/m
Power	12/15W/m
Colour Temperature	15W : 2700/3000/4000/5700/RGBW 12W : DW/RGB
CRI	>80
SDCM	3 SDCM
Luminaire Output	15W : 250/250/250/250/200lm/m 12W : 270/120lm/m
Beam Angle	120 degree
Control Gear	Remote driver
Dimming Method	DMX
Power Supply	24Vdc
IP Rating	67, 68
Luminaire Lifetime	50000 hrs
Remarks	Cutting;166.7mm Max Length;10m Address per meter 6

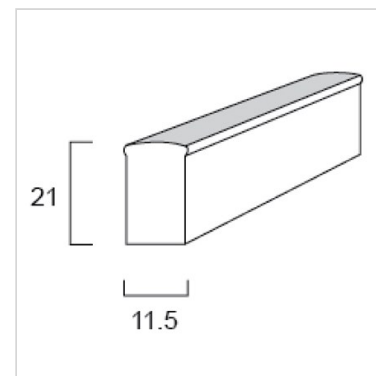

Ordering Data

Model	Watt
SLN260-HB-12W/m-DW22K-57K-F6ADD	12W/M
SLN260-HB-12W/m-RGB-F6ADD	12W/M
SLN260-HB-15W/m-2700K-F6ADD	15W/M
SLN260-HB-15W/m-3000K-F6ADD	15W/M
SLN260-HB-15W/m-3500K-F6ADD	15W/M
SLN260-HB-15W/m-4000K-F6ADD	15W/M
SLN260-HB-15W/m-5700K-F6ADD	15W/M
SLN260-HB-15W/m-RGBW40K-F6ADD	15W/M


Related Products



Serrated Aluminium



Recess Serrated Aluminium Profile



Bendable Serrated Aluminium Profile



Thickened Plastic Profile



Raceway Serrated Aluminium Profile