

LED Multi-Recessed Downlight



TIS RSAL107E

Application





Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification


Housing	Printed steel frame and Die-cast aluminium lamp head
Finishing	Powder coated in white / black
Mounting	Recessed
Power	1 lamp : 14W / 2 lamps : 28W 1 lamp : 20W / 2 lamps : 40W 1 lamp : 23W / 2 lamps : 46W 1 lamp : 30W / 2 lamps : 60W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	14W : 1540/1660/1805 lm 20W : 2200/2370/2575 lm 23W : 2635/2845/3090 lm 30W : 3500/3770/4015 lm
Luminaire Output	14W : 1342/1449/1570 lm* 20W : 1854/2002/2169 lm* 23W : 2135/2305/2497 lm* 30W : 2914/3147/3351 lm*
Beam Angle	15/24/36/60 Degree
Control Gear	Separate driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
Luminaire Lifetime	40,000 hrs
Equivalent	14W : PAR30 75W 20W : MH 20W 23W : MH 35W 30W : MH 70W
Remarks	*Value at 24 Degree

Ordering Data

Model	Watt
RSAL107E/WH-1x14LED	14W
RSAL107E/WH-1x20LED	20W
RSAL107E/WH-1x23LED	23W
RSAL107E/WH-2x14LED	28W
RSAL107E/WH-1x30LED	30W
RSAL107E/WH-2x20LED	40W
RSAL107E/WH-2x23LED	46W
RSAL107E/WH-2x30LED	60W

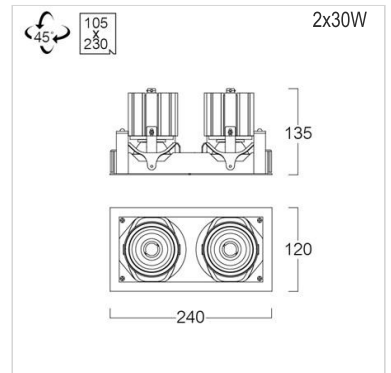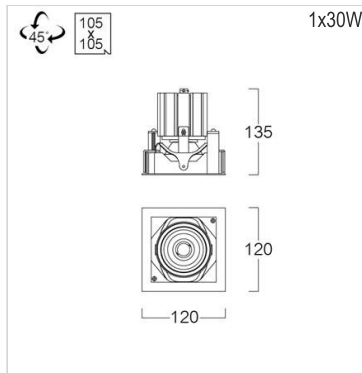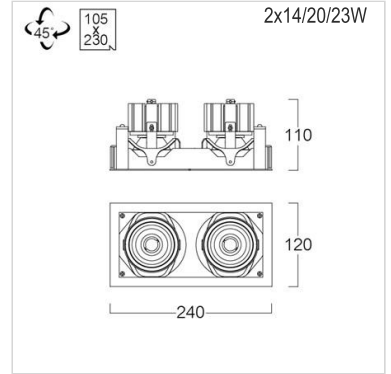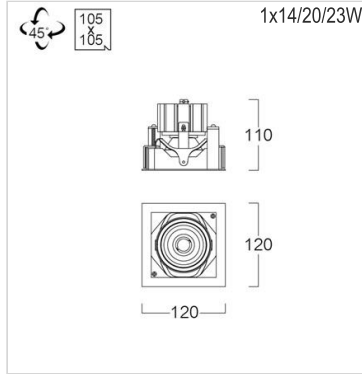

Related Products



Honey comb



Hood



RAL115E-14/20/23/30W





RAL107E-14/20/23/30W



14W

20W



15D

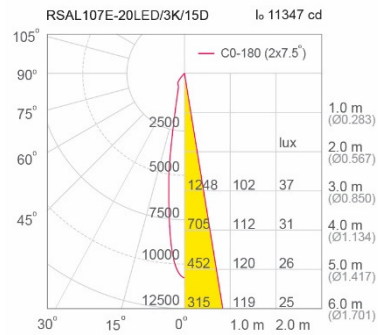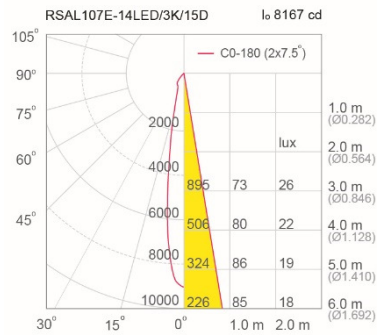



24D

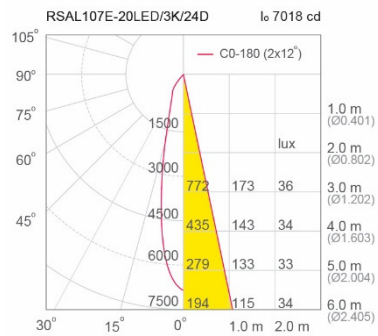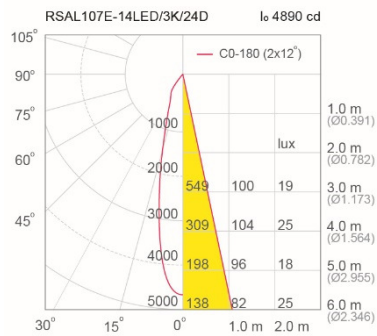

36D

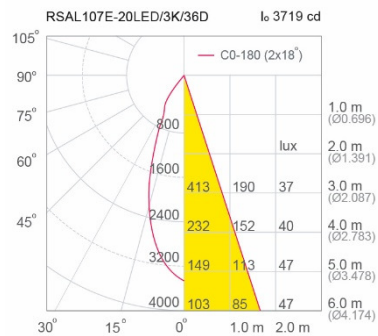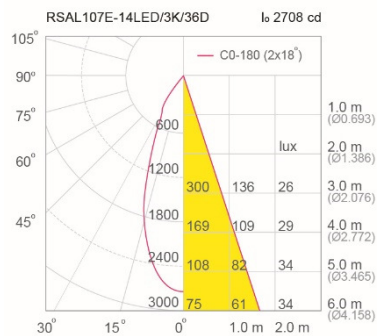



60D

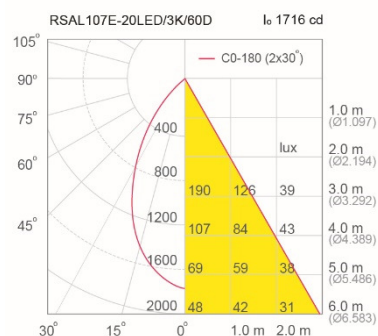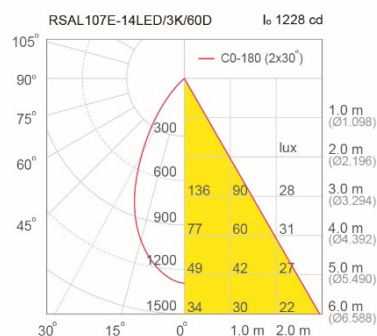



23W

30W



15D

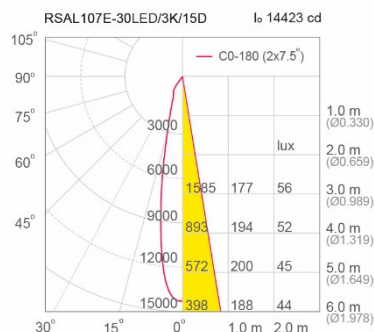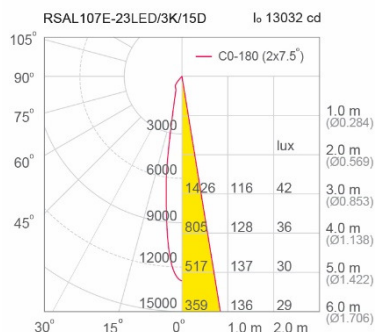

24D

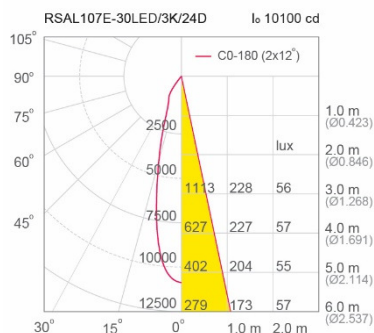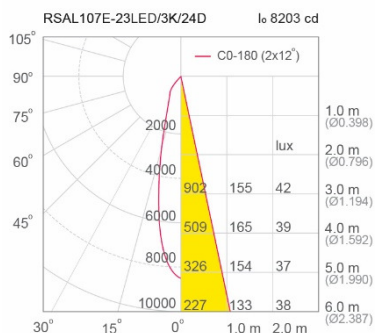

36D

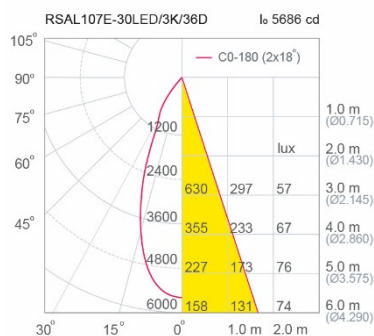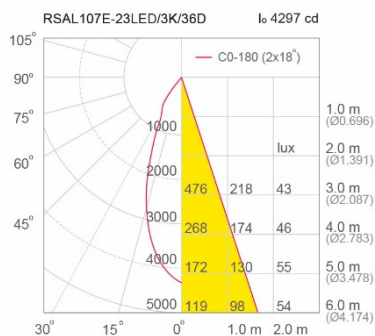

60D

