

LED Surface Downlight



TIS SAP97

Application


Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification


Housing	Die-cast aluminium lamp cover and extruded aluminium
Finishing	Powder Coated in white / black
Mounting	Surface
Power	4-7W
Light Source	LED-PAR16
Lamp Holder	GU10
Colour Temperature	2700 - 4000K
Lamp Output	4.3W : 2700K : 380 lm 5.4W : 2700K : 402 lm 7W : 3000/4000K : 620 lm
Power Supply	220VAC, 50Hz (L&E lamps) 220-240VAC, 50Hz (other brands lamp are available as option)
Power Factor	N/A
Insulation Class	I
IP Rating	20
Luminaire Lifetime	15,000-50,000 hrs.
Equivalent	PAR16 35 - 50W

Ordering Data


Model	Watt
SAP97/BK-XXLED-PAR16	4-7W
SAP97/WH-XXLED-PAR16	4-7W

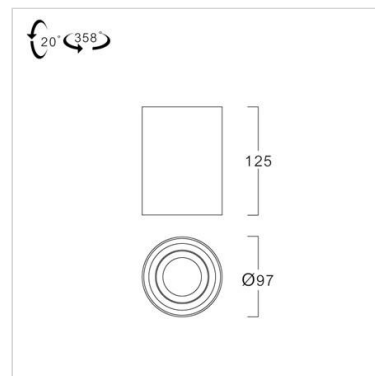

Related Products



Honey comb



Filter



SSAP97-1xLED PAR16

