

LED Recessed Linear

LUMAX



Application


This luminaire is designed to use for office buildings,schools,storage areas,hospitals, and other working areas where is required highly uniformity illumination,etc.

Specification

Housing	Extruded aluminium
Finishing	Powder coated in white
Diffuser	Opal
Mounting	Recessed T-bar (for Concealed ceiling recommend to use additional frame)
Power	40W
Light Source	LED Module
Colour Temperature	4000/6500K
Luminaire Output	4000/4000 lm
Control Gear	Separate driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	II
IP Rating	20
Luminaire Lifetime	30,000 hrs.
Equivalent	T5 2x28W/T8 2x36W

Ordering Data

Model	Watt
ERBPL300/L-40LED	40W

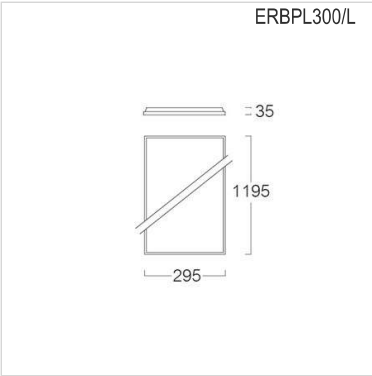

Related Products



Concealed Ceiling Frame
300x1200mm.

