

LED Surface Downlight



TIS ESDL100

Application


Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification

Housing	High purity Aluminium die-formed
Finishing	Powder coated in white or black
Diffuser	Polycarbonate (PC)
Mounting	Surface
Power	10/14W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	10W : 1120/1215/1290 lm 14W : 1540/1660/1805lm
Luminaire Output	10W : 891/962/1025 lm 14W : 1173/1267/1372 lm
Beam Angle	98 degree
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
Luminaire Lifetime	40,000 hrs.
Equivalent	10W : CFL 18W 14W : CFL 26W

Ordering Data

Model	Watt
ESDL100/WH-10LED	10W
ESDL100/WH-14LED	14W

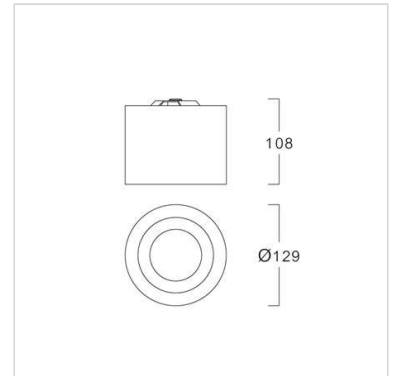

Related Products



ESDL100/BK



ESDL150-14/20W



ESDL200-20/23/27W

