

LED IP Recessed Downlight



TIS IRDL210

Application


Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification

Housing	Die-cast aluminium
Finishing	Powder coated in white
Diffuser	Opal
Mounting	Recessed
Power	40/49W
Light Source	LED-MODULE
Colour Temperature	3000/4000/6500K
Luminaire Output	40W : 4400 lm 49W : 5390 lm
Beam Angle	85 Degree
Control Gear	Separate driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.90
Insulation Class	I
IP Rating	65
Luminaire Lifetime	40,000 hrs.

Ordering Data

Model	Watt
IRDL210/WH-40LED	40W
IRDL210/WH-49LED	49W

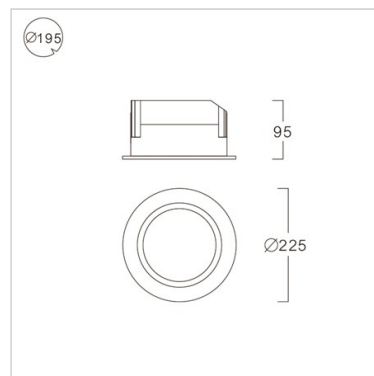


Related Products



IRDL100-10LED



IRDL130-14/20W



IRDL170-23/30W

