




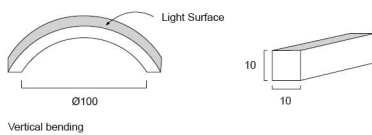


Material	LED mounted on flexible PCB in silicone jacket
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 55°C (4.5W/m) -20°C ~ 45°C (9W/m)
IP Rating	67
CRI	≥ 80
Min.Cutting Unit	83.3mm
Max. Continuous Length	Monochrome : 15m (4.5W/m), 7.5m (9W/m)
Control Options	Monochrome : 1-10V, DALI, DMX (Via Remote Driver)
Weight (kg)	0.13 kg/m

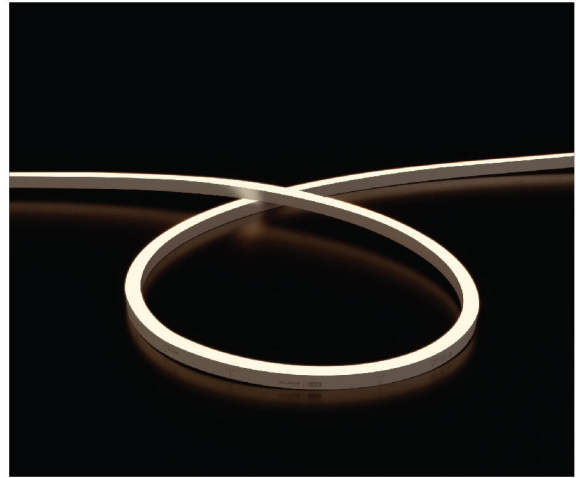

Vertical bending



Horizontal bending



Vertical bending

SLN262-VB


Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
4.5W/m	2700K (220lm/m)	120°	24 Vdc
	3000K (220lm/m)		
	3500K (220lm/m)		
	4000K (220lm/m)		
	5700K (220lm/m)		

SLN262-HB

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
4.5W/m	2700K (210lm/m)	120°	24 Vdc
	3000K (210lm/m)		
	3500K (210lm/m)		
	4000K (210lm/m)		
	5700K (210lm/m)		


SLN262-VB

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
9W/m	2700K (440lm/m)	120°	24 Vdc
	3000K (440lm/m)		
	3500K (440lm/m)		
	4000K (440lm/m)		
	5700K (440lm/m)		

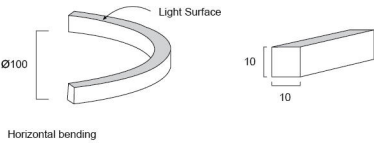


SLN262-HB

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
9W/m	2700K (420lm/m)	120°	24 Vdc
	3000K (420lm/m)		
	3500K (420lm/m)		
	4000K (420lm/m)		
	5700K (420lm/m)		




Accessories


Injection-Moulded connector (E/S/B) + End cap




E = END



S = Side




B = Button




End Cap

Aluminium Profile



Serrated
Aluminium Profile



Recess Serrated
Aluminium Profile



Bendable Serrated
Aluminium Profile