

LED Wallmount



TIS WRL450

Application


Wall mount luminaire is designed to use for indoor applications such as walkways, steps, wall illumination, etc.

Specification

Housing	Die-cast aluminium
Finishing	Powder coated in white
Dimension	dia.45x48 mm.
Mounting	Recessed
Power	1w
Light Source	LED-COB
Colour Temperature	3000K
Luminaire Output	87 lm
Control Gear	Remote driver 3V 350mA
Power Supply	220-240VAC, 50Hz
IP Rating	20

Ordering Data

Model	Watt
WRL450/WH-1LED/3K	1W

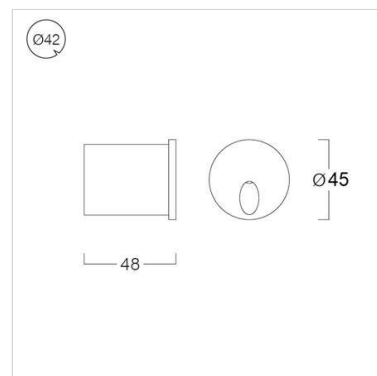

Related Products



WRL450/BK



Driver 3V 350mA