

LED Recessed Linear



RWLL37

Application





This luminaire is designed to use for office buildings, schools, storage areas, hospitals, and other working areas where is required highly uniformity illumination, etc.

Specification


Housing	Die-cast aluminium
Finishing	Powder coated in white or black
Mounting	Recessed wall washer
Power	12/20/30W
Light Source	LED Module
Colour Temperature	3000/4000/5000K
CRI	>80
Luminaire Output	12W : 535 lm 20W : 955 lm 30W : 1470 lm
Control Gear	Separate driver
Power Supply	220VAC 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
Luminaire Lifetime	30,000 hrs.

Ordering Data

Model	Watt
RWLL37-12LED	12W
RWLL37-20LED	20W
RWLL37-30LED	30W

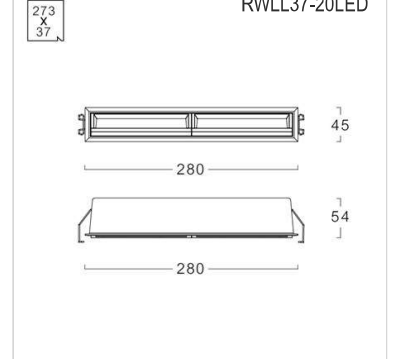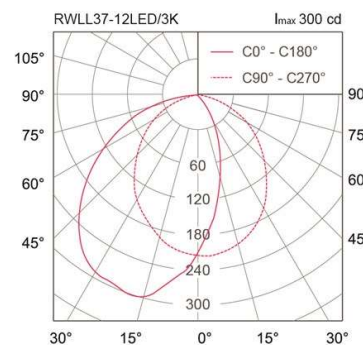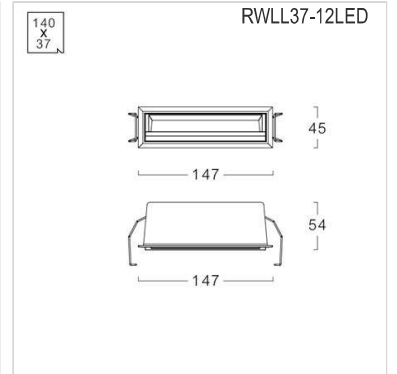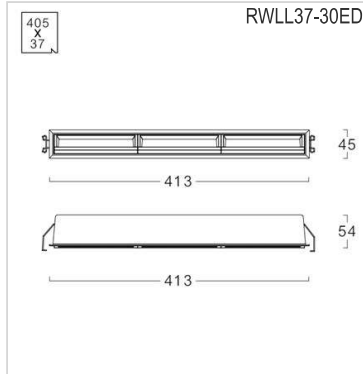

Related Products



LED Module

