

LED IP Surface Downlight



TIS ISSL1515

Application

Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification






Housing	Die-cast and extruded aluminium
Finishing	Powder coated in black
Mounting	Ceiling
Power	23/30W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	23W : 2635/2845/3090 lm 30W : 3500/3770/4015 lm
Luminaire Output	23W : 1821/1967/2131 lm * 30W : 2767/2988/3182 lm *
Beam Angle	24/36/60 Degree
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	65
LED Lifetime	40,000 hrs.
Equivalent	23W : MH 35W 30W : MH 70W

Remarks

Install on ceiling only
* Value at 24 Degree

Ordering Data

Model	Watt
ISSL1515/BK-23LED	23W
ISSL1515/BK-30LED	30W

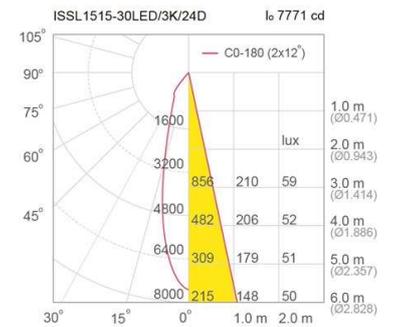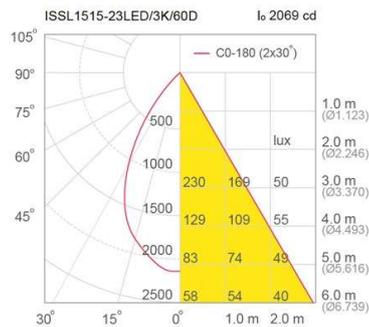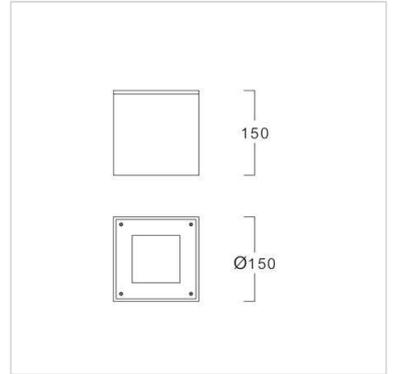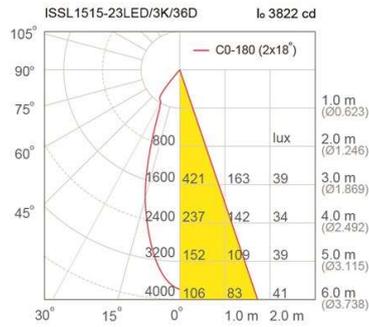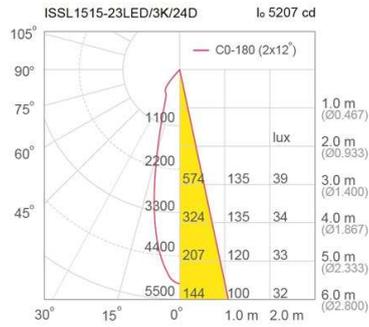

Related Products

