

LED Emergency / Exit Sign



TIS ERL4

Application


This luminaire is designed to use for safety reason in case of emergency situation.

Specification

Housing	Die-formed cold rolled steel
Finishing	Powder coated in white
Charger	Fully automatic solid stage with constant voltage and limit current charging
Battery	Lithium Iron Phosphate, 3.2V 2.7Ah
Dimension	425x145x221 mm.
Mounting	Recessed ceiling mounted
Safety	Low-high voltage cut-off to protect under discharge, over charge of battery. AC/DC fuse is well prepared to protect input and output short circuit
Power	10W
Light Source	LED Module
Power Supply	220-240VAC,50Hz
Power Factor	> 0.65
Insulation Class	I
IP Rating	20
Equivalent	T8 10W
Remarks	3 Hrs. Back-up time

Ordering Data

Model	Watt
ERL4/D-10LED	10W
ERL4/S-10LED	10W

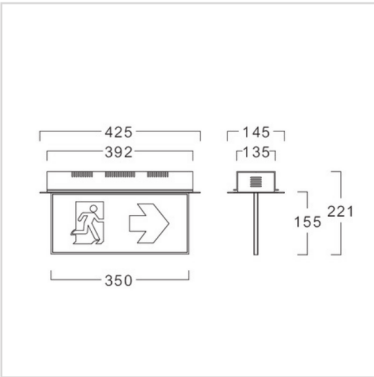

Face design

EF 01	EF 02	EF 03	EF 04
EF 05	EF 06	EF 07	EF 09