

LED Batten



LLIST/MI/CT

Application





This luminaire is designed to use for convenience stores, discount stores, modern trade stores, factories, schools, storage areas, hospitals, hotels, shopping centers, corridors, industrial areas, car parks, etc.

Specification

Housing	Die-formed cold roll steel
Finishing	Powder coated in white
Reflector	Mirror anodized aluminium
Mounting	Surface or suspended
Power	1S : 7-9W (1 lamp) 1L : 14-16W (1 lamp) 2S : 14-18W (2 lamps) 2L : 28-32W (2 lamps)
Light Source	LED-T8
Lamp Holder	G13
Colour Temperature	3000/4000/6500K
Lamp Output	1S : L&E : 7/8/9W : 1050 lm 1L : L&E : 14/16W : 2100 lm 2S : L&E : 2x7/8/9W : 2x1050 lm 2L : L&E : 2x14/16W : 2x2100 lm
Luminaire Output	1S : 7/8/9W : 964 lm 1L : 14/16W : 1928 lm 2S : 14/16/18W : 1932 lm 2L : 28/32W : 3864 lm
Power Supply	220-240VAC, 50Hz
Insulation Class	I
IP Rating	20
LED Lifetime	L&E : 25,000/50,000 hrs.
Equivalent	7-9W : T5 1x14W/T8 1x18W 14-16W : T5 1x28W/T8 1x36W 14-18W : T5 2x14W/T8 2x18W 28-32W : T5 2x28W/T8 2x36W

Ordering Data

Model	Watt
LLIST/MI/1S/CT-XXLED-T8	7-9W
LLIST/MI/1L/CT-XXLED-T8	14-16W
LLIST/MI/2S/CT-XXLED-T8	14-18W
LLIST/MI/2L/CT-XXLED-T8	28-32W

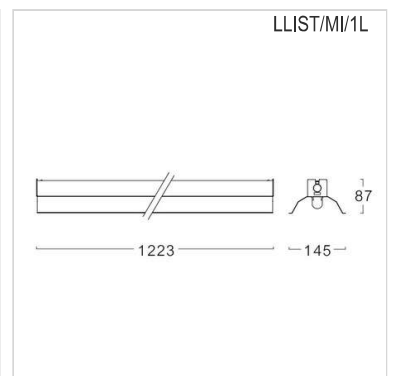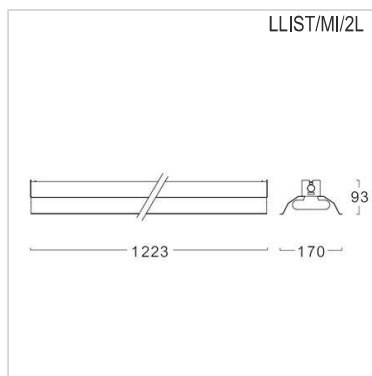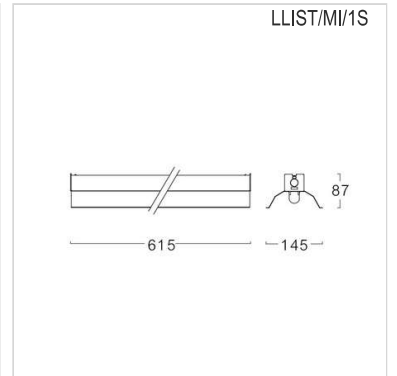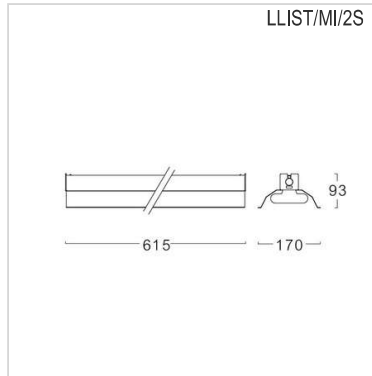

Related Products



LED-T8

