


# SLN261-BASIC

---

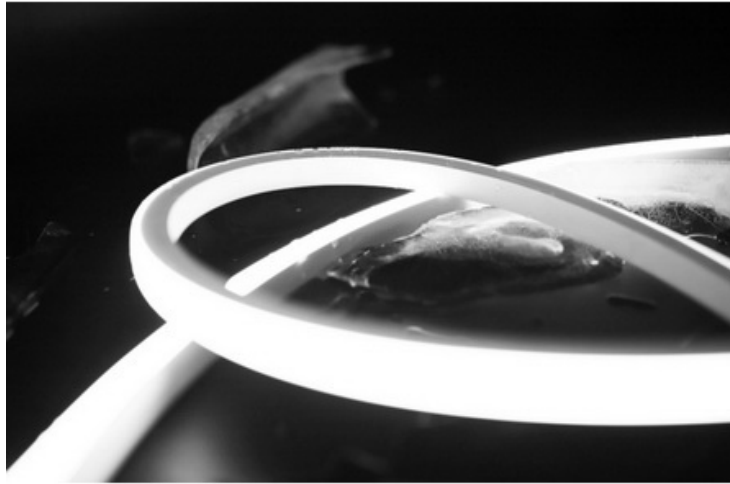

## LED LINEAR FLEX

SLN261-BASIC is a direct view, small profile, energy efficient and flexible LED NEON suitable for both dry & wet locations capable of horizontal & vertical bends up to 300 cm diameter. with the special design of injection end capsulation, SLN261-BASIC can achieve both seamless continuous light effect and the ingress protection rating at level 67.

**Material :**

LED mounted on flexible PCB in silicone resin jacket  
(For indoor, landscape and facade application)

**Driver :**

Remote 24 Vdc constant voltage driver or PWM driver

**life time** : 50,000 hours, (L70)

**Ambient Temperature** : -40°C ~ 55°C

**IP Rating** : 67

**Min. Cutting Unit** : 20.83mm

**Max. Continuous Length** : 10m

**Factory Supplied Cable :**

2C x 0.75 mm<sup>2</sup>, L = 3.00 m

**Control** : on-off, 0/1-10V, DMX, DALI

**Weight (kg)** : 0.4 kg/m



## Accessories

Injection-Moulded connector (E/S/B) + End cap IP67



E = END




S = Side




B = Bottom




End Cap

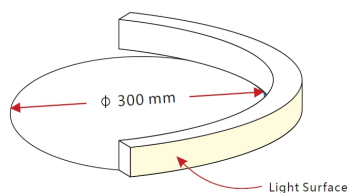

Vertical bending

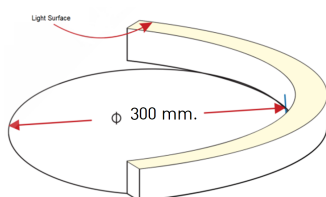

Horizontal bending

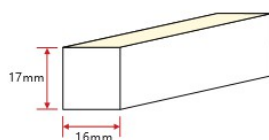


Model	Watt	CCT. (K)	Beam Angle (50%)	Color	Input (V)
SLN261-BASIC	9W/m (VB)	2700K (520lm/m)	120°	White	24 Vdc
		3000K (520lm/m)			
		4000K (520lm/m)			
		5700K (520lm/m)			
	9W/m (HB)	2700K (420lm/m)	120°	White	24 Vdc
		3000K (420lm/m)			
		4000K (420lm/m)			
		5700K (420lm/m)			



## Aluminium Profile

### Serrated Aluminium Profile

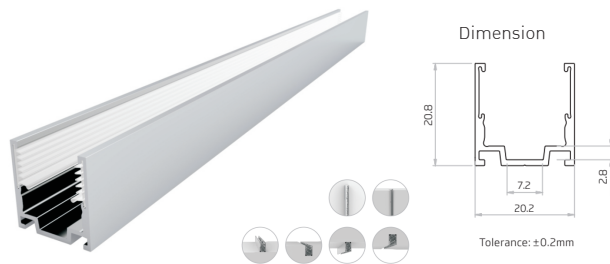

### Bendable Serrated Aluminium Profile

