

LED Recessed Linear



TIS SEN R

Application





This luminaire is designed to use for office buildings, schools, storage areas, hospitals, and other working areas where is required highly uniformity illumination, etc.

Specification

Housing	Extruded aluminium
Finishing	Powder coated in white
Diffuser	Acrylic (PMMA)
Mounting	Recessed
Power	R60 : 6/8/10/12/15/17W R120 : 12/16/20/24/30/34W
Light Source	LED Module
Colour Temperature	3000/4000/6500K
Luminaire Output	R60 : 6W : 535 lm, 8W : 800 lm R60 : 10W : 1045 lm, 12W : 1285 lm R60 : 15W : 1550 lm, 17W : 1780 lm R120 : 12W : 1055 lm, 16W : 1580 lm R120 : 20W : 2060 lm, 24W : 2545 lm R120 : 30W : 3045 lm, 34W : 3480 lm
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
Luminaire Lifetime	30,000 hrs.
Remarks	Lumen output refer to white fixture Option 1. Luminaire connector (Continued)

Ordering Data

Model	Watt
SEN R60-6LED	6W
SEN R60-8LED	8W
SEN R60-10LED	10W
SEN R60-12LED	12W
SEN R60-15LED	15W
SEN R60-17LED	17W
SEN R120-12LED	12W
SEN R120-16LED	16W
SEN R120-20LED	20W
SEN R120-24LED	24W
SEN R120-30LED	30W
SEN R120-34LED	34W

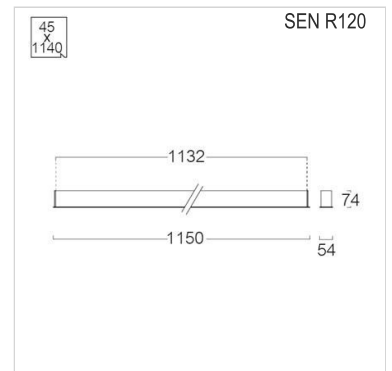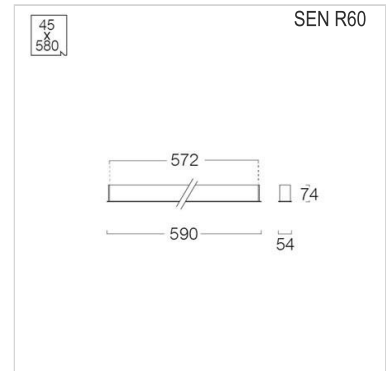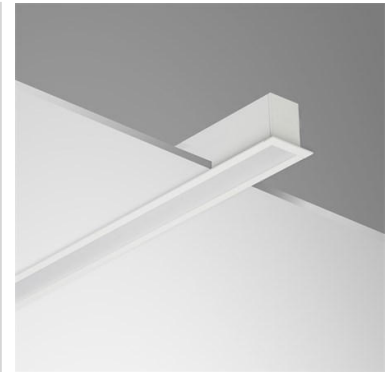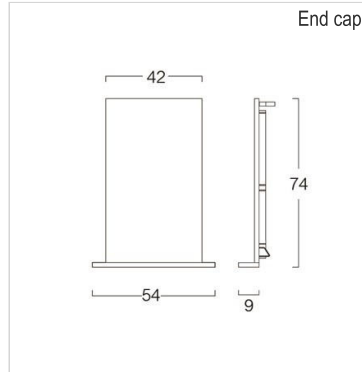

Related Products



LED Module