

LED Multi-Recessed Downlight

L&E

 TIS MRDC125T

Application



Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification

Housing	Painted Aluminum Frame
Finishing	Powder coated in white
Mounting	Recessed
Power	5-12W
Light Source	LED-BULB
Lamp Holder	E27
Colour Temperature	3000/6500K
Lamp Output	5W : 3000/6500K : 470/510 lm 7W : 3000/6500K : 630/690 lm 9W : 3000/6500K : 810/850 lm 12W : 3000/6500K : 1200/1300 lm
Beam Angle	112 degree
Power Supply	220VAC,50Hz (L&E lamps) 220-240VAC,50Hz (other brands lamp are available as option)
Power Factor	N/A
Insulation Class	II
IP Rating	20
LED Lifetime	25,000 hrs.
Equivalent	CFL 8-18W

Ordering Data

Model	Watt
MRDC125T/WH-XXLED-BULB	5-12W

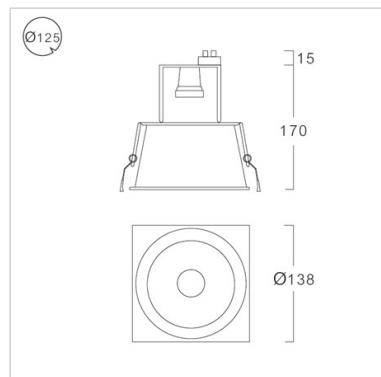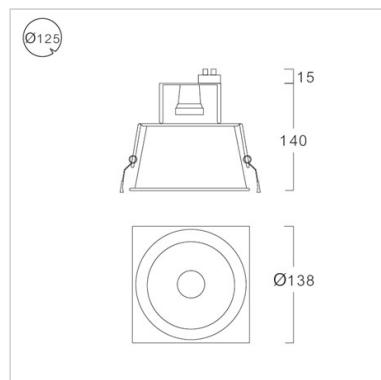

Related Products



RDC125T-LED BULB

