

# LED Surface Downlight



## ESDL200

### Application





Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

### Specification

<b>Housing</b>	High purity Aluminium die-formed
<b>Finishing</b>	Powder coated in white or black
<b>Diffuser</b>	Polycarbonate (PC)
<b>Mounting</b>	surface
<b>Power</b>	20/23/27W
<b>Light Source</b>	LED-COB
<b>Colour Temperature</b>	3000/4000/5000K
<b>CRI</b>	>90/ >90/ >80
<b>Lamp Output</b>	20W : 2200/2370/2575lm 23W : 2635/2845/3090 lm 27W : 3065/3300/3515 lm
<b>Luminaire Output</b>	20W : 1925/2079/2252 lm 23W : 2134/2305/2497 lm 27W : 2390/2581/2968 lm
<b>Beam Angle</b>	98 degree
<b>Control Gear</b>	Built-in driver
<b>Power Supply</b>	220-240VAC, 50Hz
<b>Power Factor</b>	>0,9
<b>Insulation Class</b>	I
<b>IP Rating</b>	20
<b>Luminaire Lifetime</b>	40,000 hrs.
<b>Equivalent</b>	20W : CFL 2x18W 23W: CFL 2x26W 27W: CFL 2x32W

### Ordering Data

Model	Watt
ESDL200/WH-20LED	20W
ESDL200/WH-23LED	23W
ESDL200/WH-27LED	27W

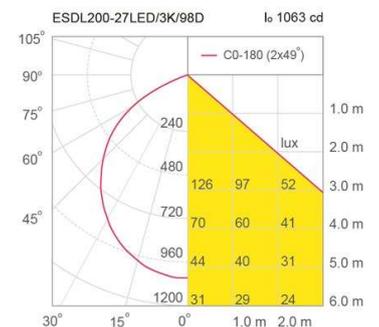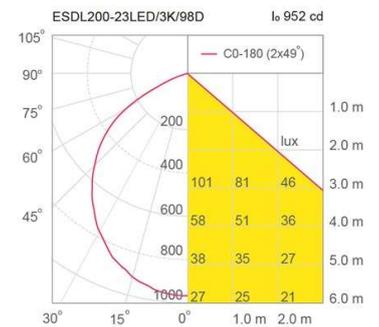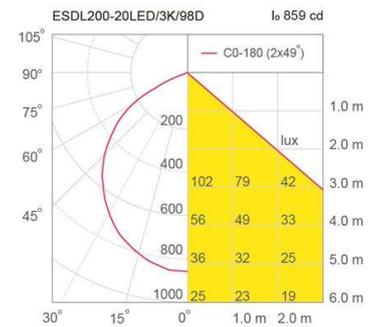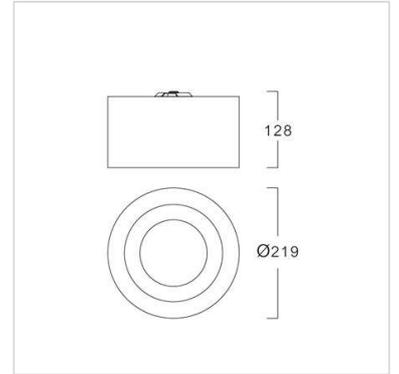

### Related Products

