



LED Switching Power Supply

- Protections: short circuit/over load/over voltage/over temperature
- Soothing start, soft light and eye protection , with four gears
- Cooling by free air, high reliability
- 100% full load burn-in test
- Suitable for internal lights application for I/II/III. Lighting Fixtures.
- Class I.
- Widely used in LED lighting and IT equipment
- Compliance to world wide safety regulation for led lightings.



SELV IP20




Specification

Model		LES-60-012-IP20	LES-60-024-IP20
OUTPUT	Output voltage	12VDC	24VDC
	Output voltage range	12VDC±0.5VDC	24VDC±0.5VDC
	Output current	Max 5A	Max 2.5A
	Output power	Max 60W	
	Output power range	0~60W	
	Linear Regulation	±1%	
	Load Regulation	±1%	
	Start-up Time (typ.)	600ms/230VAC 800ms/115VAC	
INPUT	Input voltage	175-264Vac or 100-130Vac	
	Frequency	50/60Hz	
	Input current	0.52A/230Vac or 0.92A/115Vac	
	Power factor	PF>0.55	
	No-load power consumption	< 3W	
	Efficiency (typ.)	87%	89%
	Inrush current(typ.)	Cold start 50A at 230Vac	
	Breaker (typ.)	16A typ: C (8 In) Max 3 Pcs.	
		16A typ: D (15 In) Max 5 Pcs.	
	Control surge capability	L,N:1KV L,N-PE:2KV	
Leakage current	Max. 0.5mA		
ENVIRONMENT	Working temperature	ta: -30℃~ 50℃ tc: 80℃	
	Working humidity	20 ~ 99%RH, non-condensing	
	Storage temp., humidity	-40℃ ~ 80℃, 10~95%RH	
PROTECTION	Overtemperature	Protection type: Turn off the output voltage, after the temperature drops, re-energize to restore.	
	Over load protection	Shut down the output when current load ≥110%~150%, auto recovers.	
	Short circuit protection	Protection type: It can be automatically restored after the fault is eliminated.	
SAFETY & EMC	Withstand voltage	I/P-O/P:3750Vac	
	Isolation resistance	I/P-O/P: 100MΩ/500VDC/25℃/70%RH	
	Safety standards	IEC/EN61347;IEC/EN60950;IP20	
	EMC Test Standards	EN55015: 2013;EN61547: 2009; EN61000-3-2:2014; EN61000-3-3:2013	
Reliability and Quality Control	Impact aging	100% of the product is fully loaded and impacted for 4 hours under an environment of at least 40℃±5℃	
	Component derating	Under the steady-state conditions of rated input and output, the stress of components will not exceed its maximum nominal value	
NOTE	1. All parameters not specifically mentioned are measured at 230VAC input, rated load and 25℃ ambient temperature. 2. Ripple and noise test method: connect 0.1uF and 47uF capacitors in parallel at the terminal, and measure under 20MHZ bandwidth. 3. Ensure that the power supply is used under the rated parameters and environment.		




Dimensions
Unit:mm

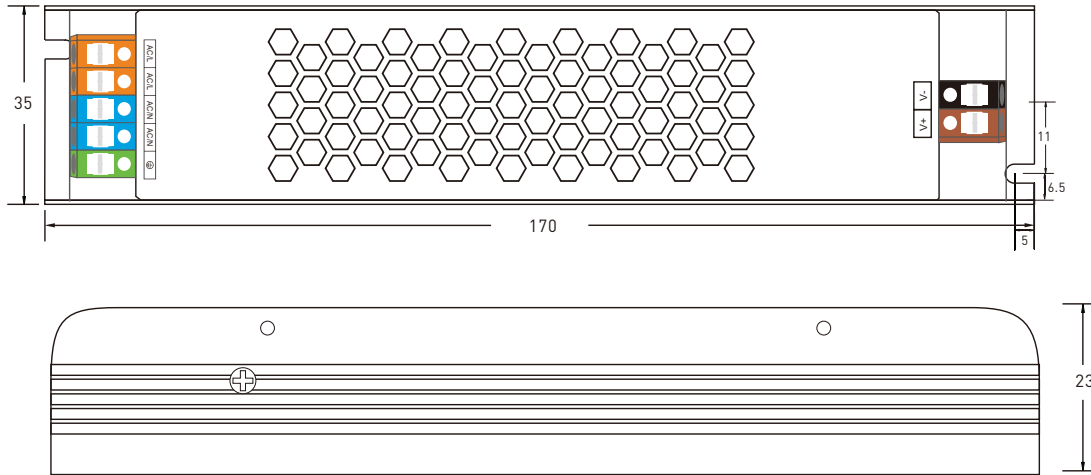


Relationship diagrams

Efficiency vs Load

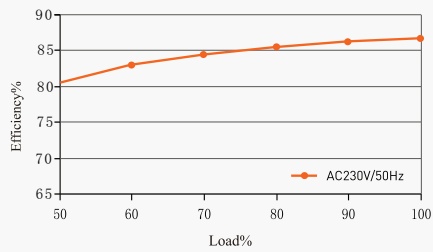

LES-60-012-IP20

Efficiency vs Load

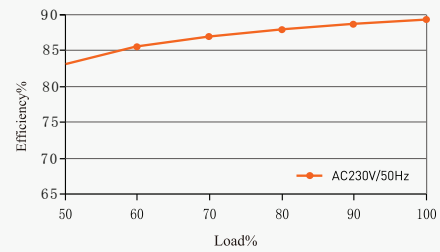


LES-60-024-IP20

Packaging Information

DIMENSION	170x35x23mm(LxWxH)
PACKING	176x39x27mm(LxWxH)
CARTON QUANTITY	100PCS
CARTON SIZE	370x290x220mm(LxWxH)
WEIGHT	135g±10g/PCS

Temperature load curve

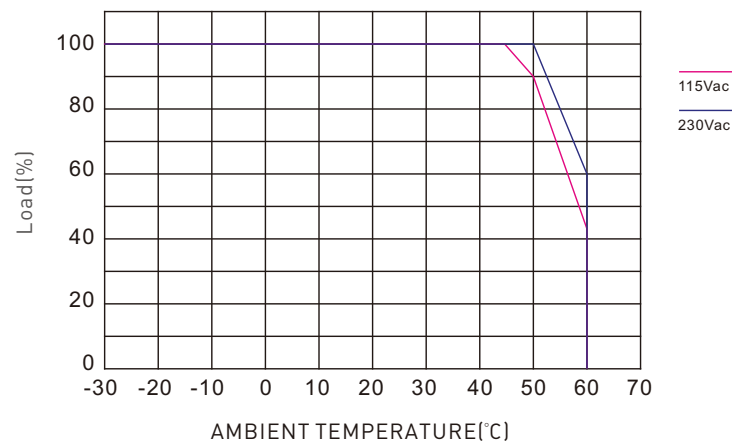

* No further notice if any changes in the manual. Product function depends on the goods. Please feel free to contact your supplier if any question.