


Material	UV Resistant ABS housing
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 50°C
IP Rating	65
CRI	≥ 80
Maximum module per string	16 Modules
Pitch	300mm - 2000mm
Control Options	Monochrome : DMX Colorchange : DMX
Weight (kg)	0.1 kg/pcs

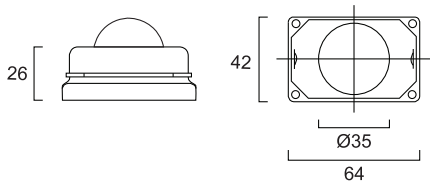

SMF209

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
3W	2700K (194lm)	110°	24Vdc
	3000K (213lm)		
	4000K (237lm)		
	6500K (255lm)		
	RGB (57lm)		
	RGBW (105lm)		

Accessories



Feeder Cable L = 300 mm



Feeder Cable L = 3000 mm



Extention Cable L= 300 mm

LED MEDIA FACADE

