

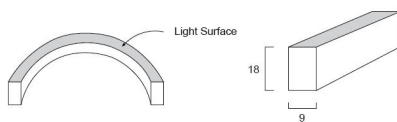


Material	LED mounted on flexible PCB in silicone jacket
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 55°C
IP Rating	67, 68
CRI	≥ 80
Min.Cutting Unit	83.3mm
Max. Continuous Length	15m
Control Options	Monochrome : 1-10V, DALI, DMX (Via Remote Driver)
Weight (kg)	0.25 kg/m




SLN263-HB

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
4.5W/m	2700K (130lm/m)	120°	24Vdc
	3000K (130lm/m)		
	3500K (130lm/m)		
	4000K (130lm/m)		
	4000K (130lm/m)		
	5700K (130lm/m)		
9W/m	2700K (260lm/m)		
	3000K (260lm/m)		
	3500K (260lm/m)		
	4000K (260lm/m)		
	4000K (260lm/m)		
	5700K (260lm/m)		




Accessories


Injection-Moulded connector (E/S/B) + End cap




E = END



S = Side





B = Button



End Cap

Aluminium Profile

Serrated
Aluminium ProfileRecess Serrated
Aluminium ProfileBendable Serrated
Aluminium Profile