

LED Recessed Downlight



TIS RAL35

Application






Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification

Housing	Die-cast aluminium
Description	3 different lamp heads are available for various applications WR (front reflector white) MB (front reflector mirror black) MI (front reflector mirror chrome) Powder Coated in white / black
Finishing	Powder Coated in white / black
Mounting	Recessed
Power	8W
Light Source	LED-COB
Colour Temperature	3000/4000K
CRI	> 80
Lamp Output	657/710 lm
Luminaire Output	337/364 lm*
Beam Angle	24/30/36/45 degree
Control Gear	Separate driver
Power Supply	220VAC 50Hz
Power Factor	>0.9
Insulation Class	II
IP Rating	20
Luminaire Lifetime	40,000 hrs.
Equivalent	MR16 50W
Remarks	*Value at 24 Degree

Ordering Data

Model	Watt
RAL35/WR/WH-8LED	8W
RAL35/MB/WH-8LED	8W

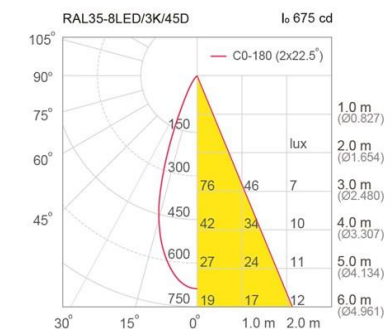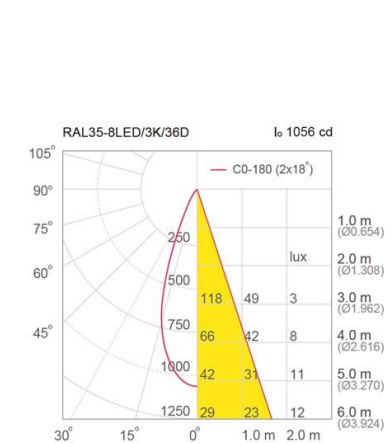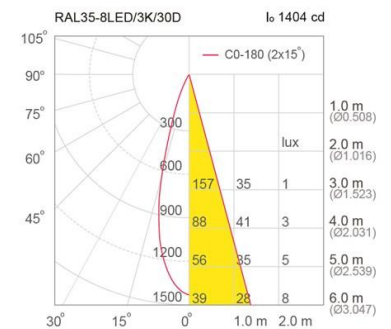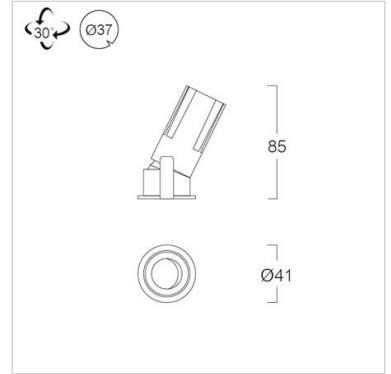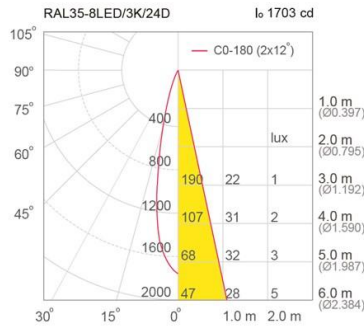

Related Products

