

# LED Recessed Linear



## TIS LRSTP600/CT

### Application




This luminaire is designed to use for office buildings, schools, storage areas, hospitals, and other working areas where is required highly uniformity illumination, etc.

### Specification

|                           |                                                            |
|---------------------------|------------------------------------------------------------|
| <b>Housing</b>            | Die-formed cold roll steel                                 |
| <b>Finishing</b>          | Powder coated in white                                     |
| <b>Reflector</b>          | Mirror anodized aluminium                                  |
| <b>Diffuser</b>           | Prismatic (Opal, Clear are available as option)            |
| <b>Mounting</b>           | Recessed                                                   |
| <b>Power</b>              | 2S:14-18W (2 lamps)<br>2L:28-32W (2 lamps)                 |
| <b>Light Source</b>       | LED-T8                                                     |
| <b>Lamp Holder</b>        | G13                                                        |
| <b>Colour Temperature</b> | 3000/4000/6500K                                            |
| <b>Lamp Output</b>        | 2S:L&E : 2x7/8/9W:2x1050 lm<br>2L:L&E : 2x14/16W:2x2100 lm |
| <b>Luminaire Output</b>   | 2S: 14/16/18W : 1590 lm<br>2L: 28/32W : 3180 lm            |
| <b>Power Supply</b>       | 220-240VAC, 50Hz                                           |
| <b>Power Factor</b>       | >0.9                                                       |
| <b>Insulation Class</b>   | I                                                          |
| <b>IP Rating</b>          | 40                                                         |
| <b>Luminaire Lifetime</b> | L&E:25,000/40,000/50,000 hrs.                              |
| <b>Equivalent</b>         | 14-18W:T5 2x14W/T8 2x18W<br>28-32W:T5 2x28W/T8 2x36W       |

### Ordering Data

| Model                          | Watt   |
|--------------------------------|--------|
| LRSTP600/2S/MI/PRF/CT-XXLED-T8 | 14-18W |
| LRSTP600/2L/MI/PRF/CT-XXLED-T8 | 28-32W |

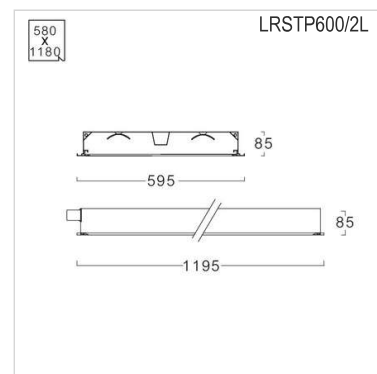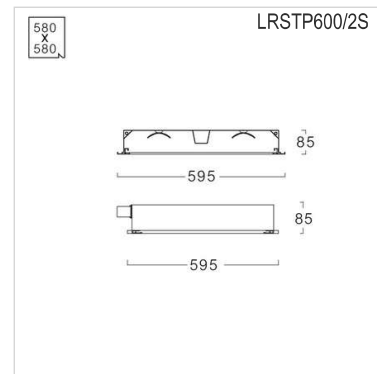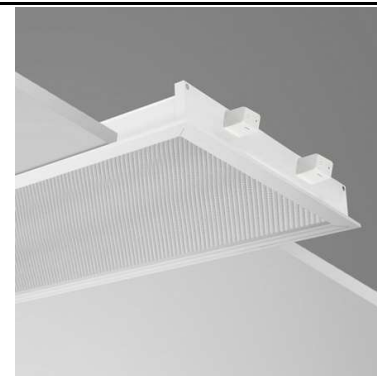

### Related Products



LED-T8

