

LED Pendant

SEN P

Application




Pendant luminaire is designed to use for office buildings, book stores, discount stores, shopping centers, convenience stores, residences, hotels, restaurants, hospitals, etc.

Specification

Housing	Extruded aluminium
Finishing	Powder coated in grey, white or black
Diffuser	Acrylic (PMMA)
Mounting	Suspension wire
Power	P60 : 6/8/10/12/15/17W P120 : 12/16/20/24/30/34W
Light Source	LED Module
Colour Temperature	3000/4000/6500K
Luminaire Output	P60 : 6W : 485 lm, 8W : 725 lm P60 : 10W : 945 lm, 12W : 1160 lm P60 : 15W : 1400 lm, 17W : 1605 lm P120 : 12W : 955 lm, 16W : 1425 lm P120 : 20W : 1860 lm, 24W : 2300 lm P120 : 30W : 2750 lm, 34W : 3145 lm
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
Luminaire Lifetime	30,000 hrs.
Remarks	Lumen output refer to gray fixture Option 1.Box with Transparent Wire 1.5m 2.Luminaire connector (Continued)

Ordering Data

Model	Watt
SEN P60-6LED	6W
SEN P60-8LED	8W
SEN P60-10LED	10W
SEN P60-12LED	12W
SEN P60-15LED	15W
SEN P60-17LED	17W
SEN P120-12LED	12W
SEN P120-16LED	16W
SEN P120-20LED	20W
SEN P120-24LED	24W
SEN P120-30LED	30W
SEN P120-34LED	34W

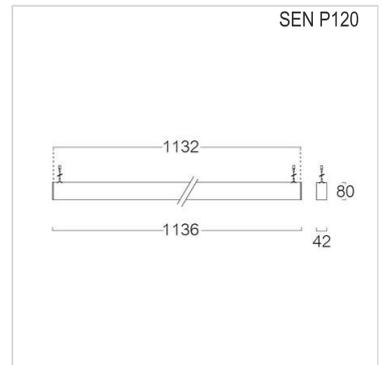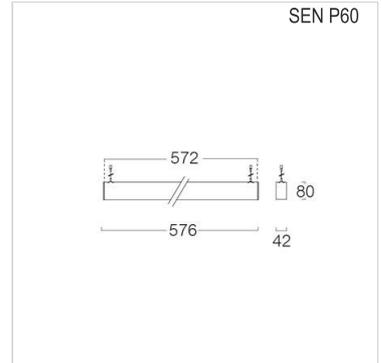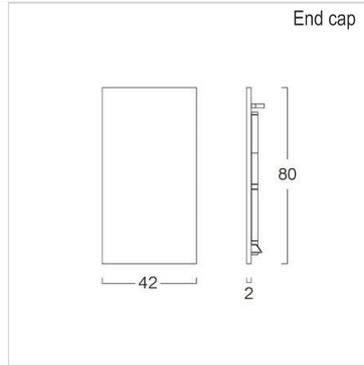

Accessories



SEN P/WH



SEN P/BK



Box with Transparent Wire 1.5m.



LED Module