

# LED Surface Downlight



## TIS SDL131

### Application



Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

### Specification

<b>Housing</b>	Die-formed aluminium
<b>Finishing</b>	Powder coated in white or black
<b>Mounting</b>	Surface
<b>Power</b>	14/20/23W
<b>Light Source</b>	LED-COB
<b>Colour Temperature</b>	3000/4000/5000K
<b>CRI</b>	>90/ >90/ >80
<b>Lamp Output</b>	14W : 1540/1660/1805 lm 20W : 2200/2370/2575 lm 23W : 2635/2845/3090 lm
<b>Luminaire Output</b>	14W : 1304/1408/1526 lm 20W : 1751/1891/2049 lm 23W : 2009/2170/2351 lm
<b>Beam Angle</b>	75 degree
<b>Control Gear</b>	Built-in driver
<b>Power Supply</b>	220-240VAC, 50Hz
<b>Power Factor</b>	>0.9
<b>Insulation Class</b>	I
<b>IP Rating</b>	20
<b>Luminaire Lifetime</b>	40,000 hrs.
<b>Equivalent</b>	14W : PAR30 75W 20W : MH 20W 23W : MH 35W

### Ordering Data

Model	Watt
SDL131/WH-14LED	14W
SDL131/WH-20LED	20W
SDL131/WH-23LED	23W

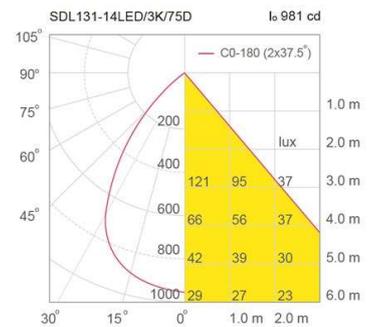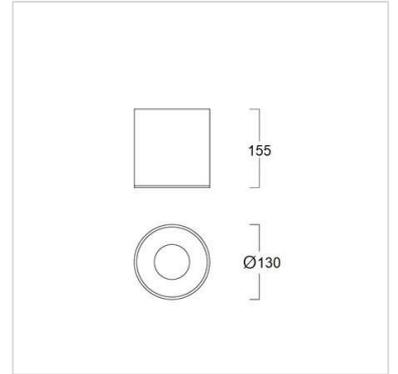

### Related Products



SDL131/BK

SDL91-10W

SDL111-14/20W

SDL169-30/35/40W



SDL193-44/49W

SSDL91-10W

SSDL111-14/20W

SSDL131-14/20/23W



SSDL161-30/35/40/44/49W

