

LED
NEONFLEX

SLN261

(Monochrome / Dynamic White)

Material	LED mounted on flexible PCB in silicone jacket
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 55°C
IP Rating	67, 68
CRI	≥ 80
Min.Cutting Unit	Monochrome : 55.6mm Dynamic White : 83.3mm
Max. Continuous Length	Monochrome : 15m (12W/m) Dynamic White : 10m (15W/m)
Control Options	Monochrome : 1-10V, DALI, DMX (Via Remote Driver) Dynamic White : DMX (Via Remote Driver)
Weight (kg)	0.5 kg/m



 MONO CHROME

 DYNAMIC WHITE

 IP67


 IP68

 24 VDC

 DMX 512


 1-10V

 DALI

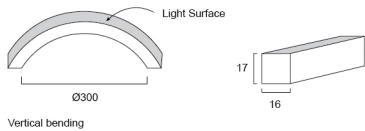


SLN261-VB

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	2700K (565lm/m)	120°	24 Vdc
	3000K (565lm/m)		
	3500K (580lm/m)		
	4000K (580lm/m)		
	5700K (580lm/m)		
	Dynamic white		
	2200K-5700K (490lm/m)		
15W/m	2700K (700lm/m)		
	3000K (700lm/m)		
	3500K (800lm/m)		
	4000K (800lm/m)		
	5700K (800lm/m)		

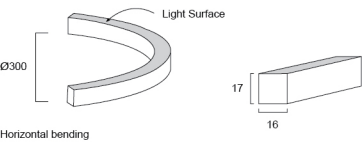


SLN261-HB

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	2700K (470lm/m)	120°	24 Vdc
	3000K (470lm/m)		
	3500K (480lm/m)		
	4000K (480lm/m)		
	5700K (480lm/m)		
	Dynamic white		
	2200K-5700K (490lm/m)		
15W/m	2700K (600lm/m)		
	3000K (600lm/m)		
	3500K (700lm/m)		
	4000K (700lm/m)		
	5700K (700lm/m)		




Accessories


Injection-Moulded connector (E/S/B) + End cap




E = END



S = Side




B = Button




End Cap

Aluminium Profile



Serrated
Aluminium Profile



Recess Serrated
Aluminium Profile







Bendable Serrated
Aluminium Profile



Thickened
Plastic Profile



Material	LED mounted on flexible PCB in silicone jacket
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 55°C
IP Rating	67, 68
CRI	≥ 80
Min.Cutting Unit	RGB : 83.3mm RGBW : 83.3mm
Max. Continuous Length	RGB : 10m RGBW : 8m
Control Options	DMX (Via Remote Driver)
Weight (kg)	0.5 kg/m

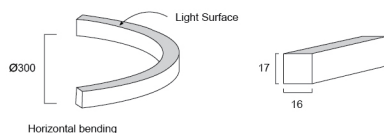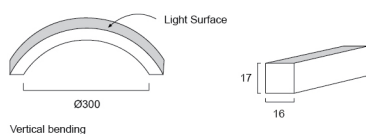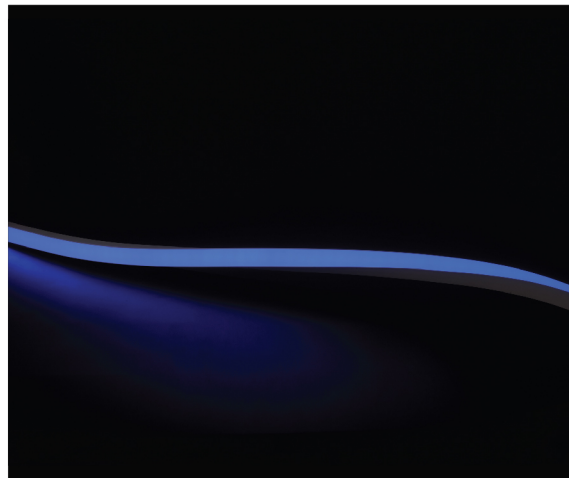

SLN261-VB


Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	RGB (370lm/m)	120°	24Vdc
15W/m	RGBW (610lm/m)		

SLN261-HB


Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	RGB (345lm/m)	120°	24Vdc
15W/m	RGBW (560lm/m)		

Accessories


Injection-Moulded connector (E/S/B) + End cap




E = END



S = Side






B = Button






End Cap

Aluminium Profile

Serrated
Aluminium ProfileRecess Serrated
Aluminium ProfileBendable Serrated
Aluminium ProfileThickened
Plastic Profile



Material	LED mounted on flexible PCB in silicone jacket
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 55°C
IP Rating	67, 68
CRI	≥ 80
Min.Cutting Unit	166.7mm
Max. Continuous Length	10m
Control Options	DMX
Address per meter	6
Weight (kg)	0.5 kg/m

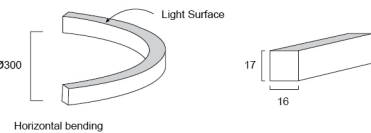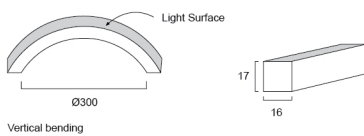**SLN261-VB**


Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	RGBW (475lm/m)	120°	24Vdc

SLN261-HB


Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	RGBW (370lm/m)	120°	24Vdc

Accessories


Injection-Moulded connector (E/S/B) + End cap




E = END






S = Side



B = Button




End Cap

Aluminium ProfileSerrated
Aluminium ProfileRecess Serrated
Aluminium ProfileBendable Serrated
Aluminium ProfileThickened
Plastic Profile




Aluminium Profile


Serrated Aluminium Profile

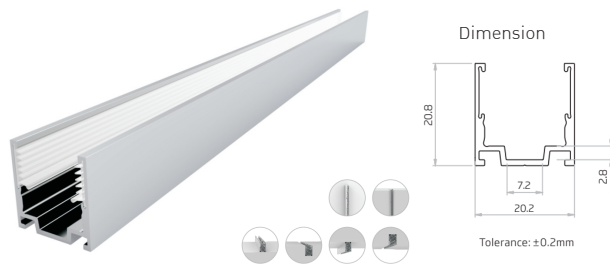


Recess Serrated Aluminium Profile

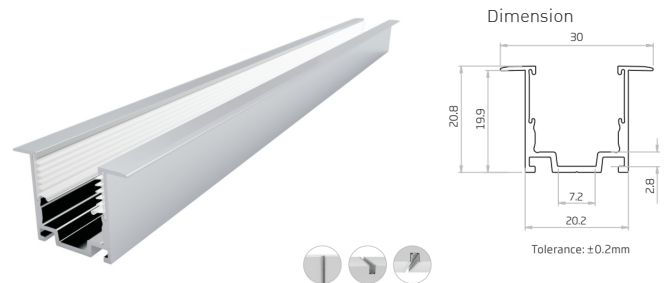

Bendable Serrated Aluminium Profile

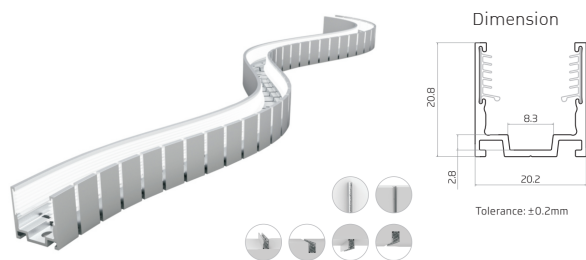

Thickened Plastic Profile

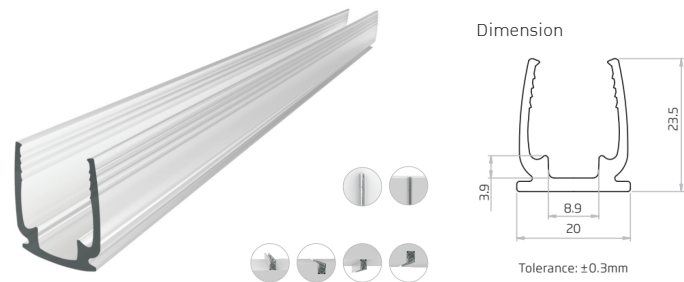

*For swimming pool application up to 2m depth.