

TIS UR012

Application


Underwater is designed to illuminate aquariums,water falls,swimming pools, fountains,etc.

Specification

Housing	316 stainless steel body
Front Cover	Tempered glass
Description	Max depth 2 meter Supplied Cable 5 meter(Optional 20 m.)
Dimension	76x47x65mm.
Weight	0.65kg
Power	5W
Colour Temperature	3000/4000/6000K
CRI	>80
SDCM	3 SDCM
Luminaire Output	414/414/414lm
Beam Angle	20/45/60 degree
Control Gear	Remote driver
Dimming Method	DMX
Power Supply	24Vdc
IP Rating	68
Luminaire Lifetime	50000hrs

Ordering Data

Model	Watt
UR012-5W-3000K-20D	5W
UR012-5W-3000K-20D-Cable 20m	5W
UR012-5W-3000K-45D	5W
UR012-5W-3000K-45D-Cable 20m	5W
UR012-5W-3000K-60D	5W
UR012-5W-3000K-60D-Cable 20m	5W

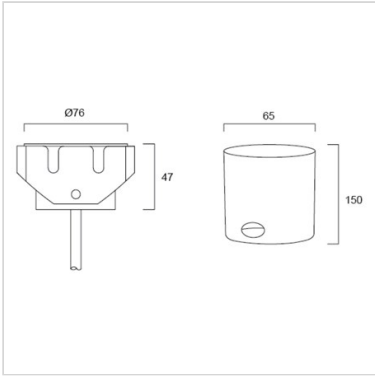

Related Products



Plastic sleeve