

LED
LINEAR
FLOOD




LF012 / LF013 / LF014

Material	Extrusion aluminium body, die-casting aluminium end cap, toughened front glass
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 50°C
IP Rating	66

CRI	≥ 80
Control Options	Monochrome : DMX Colorchange : DMX Dynamic White : DMX
Address per meter	1
Weight (kg)	1.5 kg/m



●
Black



LED LINEAR FLOOD



LF012


Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
6W (250mm)	2700K (2208lm/m)	15°	24 Vdc
12W (500mm)	3000K (2310lm/m)	30°	
24W (1000mm)	4000K (2412lm/m)	45°	
	5700K (2616lm/m)	15° x 60°	
		20° x 40°	
	RGBW (932lm/m)		
	Dynamic white 2200K-6500K (2124lm/m)		

LF013

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
9W (250mm)	2700K (3060lm/m)	15°	24 Vdc
18W (500mm)	3000K (3240lm/m)	30°	
36W (1000mm)	4000K (3276lm/m)	45°	
	5700K (3312lm/m)	15° x 60°	
		20° x 40°	
	RGBW (1787lm)		
	Dynamic white 2200K-6500K (3186lm/m)		

LF014


Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W (250mm)	2700K (3840lm/m)	15°	24 Vdc
24W (500mm)	3000K (4032lm/m)	30°	
48W (1000mm)	4000K (4128lm/m)	45°	
	5700K (4176lm/m)	15° x 60°	
		20° x 40°	
	RGBW (2382lm/m)		
	Dynamic white 2200K-6500K (4008lm/m)		

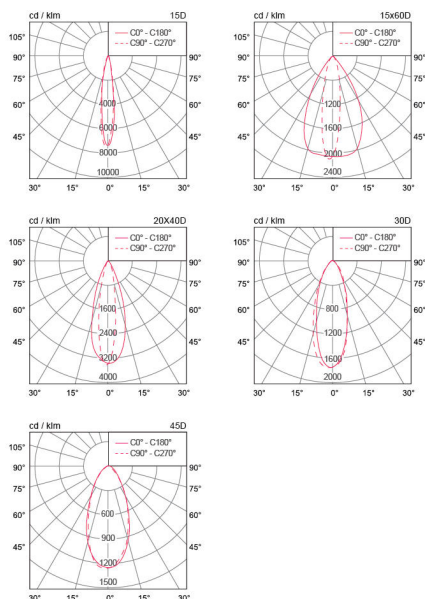

Accessories



Feeder Cable L = 350 mm



Asymmetrical Louver