

LED Pendant



TIS PDL65

Application






Pendant luminaire is designed to use for office buildings, book stores, discount stores, shopping centers, convenience stores, residences, hotels, restaurants, hospitals, etc.

Specification

Housing	Die-cast and extruded aluminium
Finishing	Powder coated in white or black
Mounting	suspension wires lenght 1.50 m.
Power	8/14W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	8W : 900/970/1040 lm 14W : 1540/1660/1805 lm *
Luminaire Output	8W : 771/833/903 lm * 14W : 1320/1426/1540 lm *
Beam Angle	15/24/40/50 Degree
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
LED Lifetime	40,000 hrs.
Equivalent	8W : PAR30 50W 14W : PAR30 75W
Remarks	* Value at 24 Degree

Ordering Data


Model	Watt
PDL65/WH-8LED	8W
PDL65/WH-14LED	14W

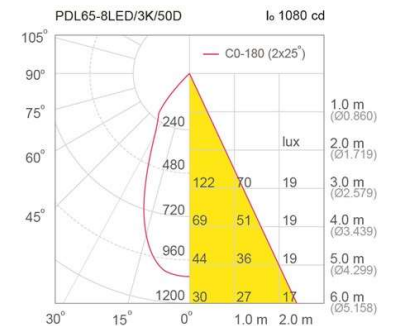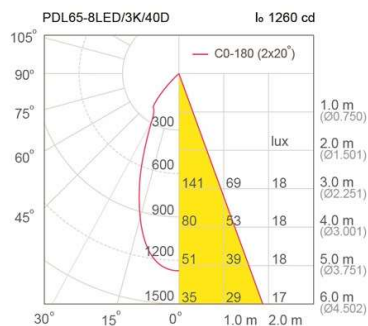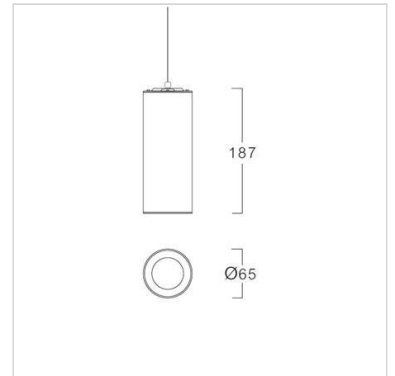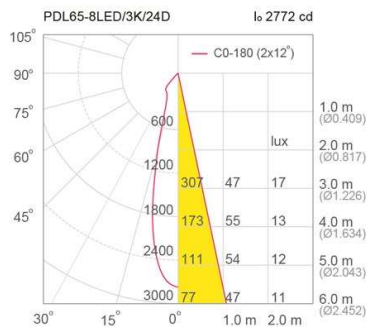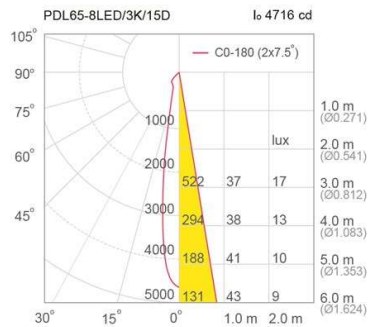

Related Products



PDL65/BK



Honey comb



TRL65-8/14W



SDL65-8/14W





SAL65-8/14W



8W

14W



15D



24D



40D



50D

