

LED Pendant

 **PAL102J**

Application

Pendant luminaire is designed to use for office buildings, book stores, discount stores, shopping centers, convenience stores, residences, hotels, restaurants, hospitals, etc.

Specification

Housing

Die-cast and extruded aluminium

Description

Upper reflector : Vacuum aluminum plating PC/ High quality lens
4 different lamp heads are available for various applications

WR (front reflector white)

BR (front reflector black)

MB (front reflector mirror black)

MI (front reflector mirror chrome)

Powder coated in white or black

suspension wires lenght 1,50 m.

Finishing

Mounting

Power

14/20/23W

Light Source

LED COB

Colour Temperature

3000/4000/5000K

CRI

>90/ >90/ >80

Lamp Output

14W : 1540/1660/1805 lm

20W : 2200/2370/2575 lm

23W : 2635/2845/3090 lm

Luminaire Output

14W : 1024/1095/1172 lm *

20W : 1907/2040/2183 lm **

23W : 2433/2603/2785 lm **

Beam Angle

14W : 10/15/26/36/45/55 Degree

20/23W : 26/36/45/55 Degree

UGR

<19

Control Gear

Built-In Driver

Power Supply

220-240VAC, 50Hz

Power Factor

>0.9

Insulation Class

I

IP Rating

20

Luminaire Lifetime

40,000 hrs

Equivalent

14W : PAR30 75W

20W : MH 20W

23W : MH 35W






Remarks

* Value at 15 Degree

** Value at 36 Degree

Ordering Data

Model	Watt
PAL102J/MI/WH-14LED	14W
PAL102J/MI/WH-20LED	20W
PAL102J/MI/WH-23LED	23W

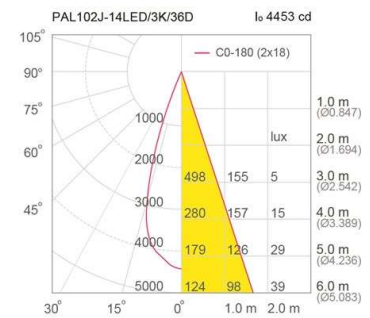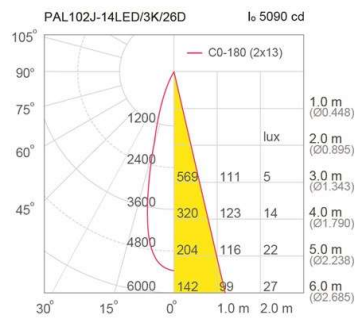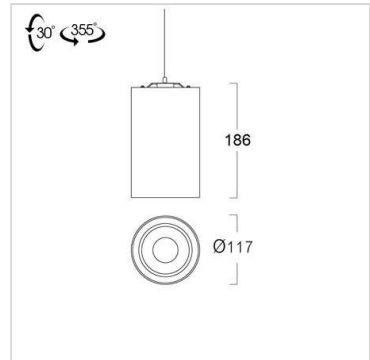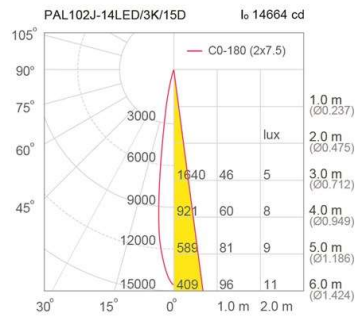
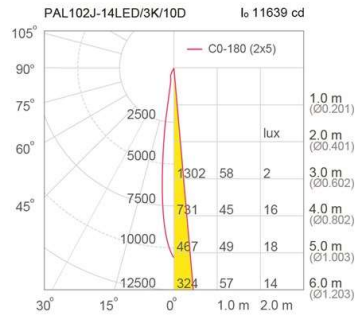


Related Products





PAL102J/BK



Honey comb

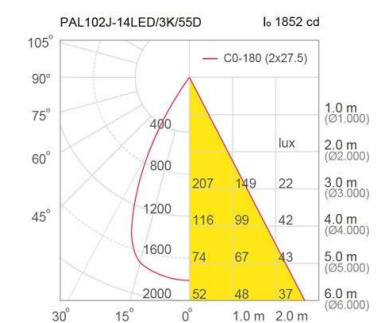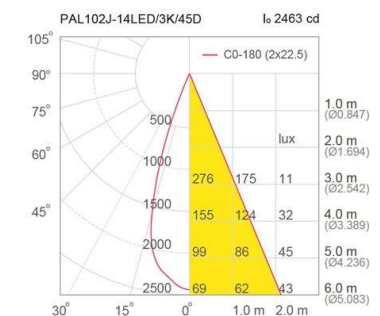



26D

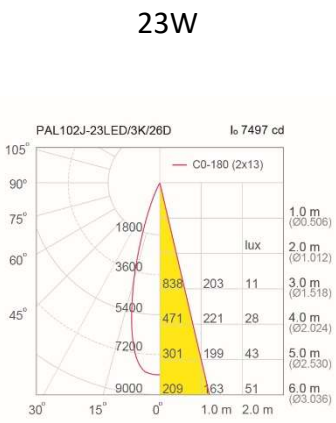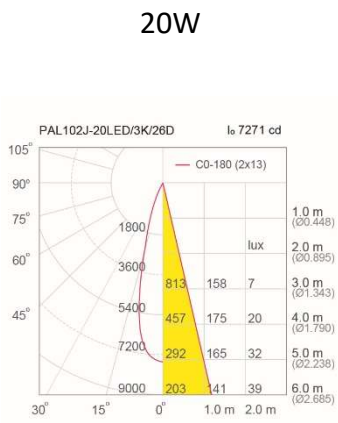

36D



45D



55D

