




SLN261 (Free Bendable)

Material	LED mounted on flexible PCB in silicone jacket
Driver	Remote driver.
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	- 40°C ~ 55°C
IP Rating	67
CRI	≥ 80
Min. Cutting Unit	55.6mm
Max. Continuous Length	10m
Control Option	0-10V, DALI, DMX (Via Remote Driver)
Weight (kg)	0.33 kg/m

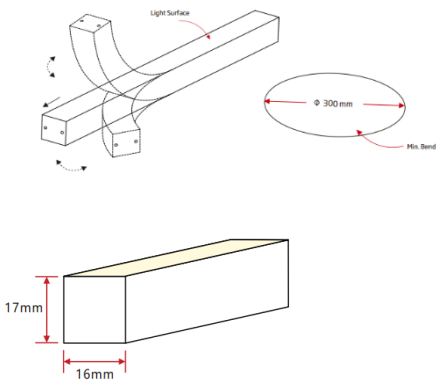


Model	Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
SLN261-FB	12W/m	2700K (800lm/m)	120°	24Vdc
		3000K (900lm/m)		
		3500K (900lm/m)		
		4000K (900lm/m)		
		5700K (800lm/m)		


Note: Unless otherwise specified, the tolerance of the dimensions is ±0.5mm.

Accessories


Injection-Moulded connector (E/S/B) + End cap




E = END



S = Side



B = Button



End Cap