




# SLN268 (Free Bendable)

|                        |                                                |
|------------------------|------------------------------------------------|
| Material               | LED mounted on flexible PCB in silicone jacket |
| Driver                 | Remote driver.                                 |
| Life Time              | 50,000 hours, L70 @ 25°C                       |
| Ambient Temperature    | - 40°C ~ 55°C                                  |
| IP Rating              | 67                                             |
| CRI                    | ≥ 80                                           |
| Min. Cutting Unite     | 250mm                                          |
| Max. Continuous Length | 5m                                             |
| Control Option         | 0-10V, DALI, DMX<br>(Via Remote Driver)        |
| Weight (kg)            | 1.10 kg/m                                      |

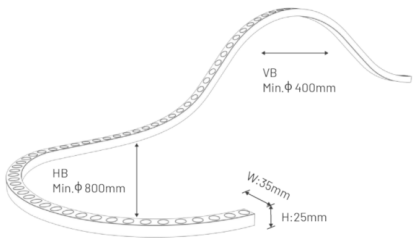

| Model     | Watt (W) | CCT (K)          | Beam Angle (°) | Input (V) |
|-----------|----------|------------------|----------------|-----------|
| SLN268-FB | 24W/m    | 2700K (1800lm/m) | 12°            | 24Vdc     |
|           |          | 3000K (1900lm/m) | 25°            |           |
|           |          | 4000K (2000lm/m) | 15°*25°        |           |
|           |          | 5700K (2000lm/m) | 15°*40°        |           |
|           |          |                  | 15°*60°        |           |

## CONNECTOR

IP67 Sillcone Injection Moulded Connector

