

LED Post Top




 **FRAME P300**

Application

Post-top luminaire is designed to use for public or private areas such as hotels, houses,gardens,parks,walkways,etc.

Specification

Housing	Die-cast and extruded aluminium
Finishing	Powder coated in graphite
Lens	Clear toughened glass
Gasket	Silicone rubber
Dimension	150x150x3000 mm.
Mounting	Surface
Power	10/20W
Light Source	LED-COB
Colour Temperature	3000/4000K
Luminaire Output	10W: 300/330 lm 20W: 600/660 lm
Beam Angle	Symmetrical medium beam
Control Gear	Built-in driver
Power Supply	220VAC 50Hz
Power Factor	>0.95
Insulation Class	I
IP Rating	65
Luminaire Lifetime	50,000 hrs.
Remarks	Size M10 hot-dip galvanized J-bolts are used for installation mounting base on concrete foundation

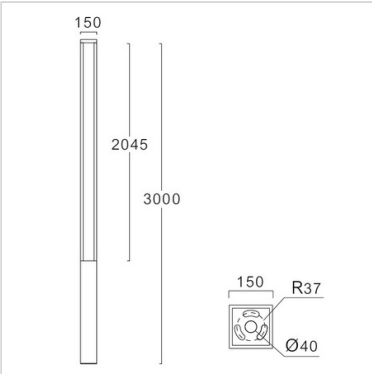

Ordering Data

Model	Watt
FRAME P300-10LED	10W
FRAME P300-20LED	20W

Related Products

