



Material	LED mounted on flexible PCB in PVC jacket with optics
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 60°C
IP Rating	65
CRI	≥ 90

Min.Cutting Unit	Monochrome : 125mm RGB / RGBW : 250mm
Max. Continuous Length	5m
Control Options	Monochrome : 1-10V, DALI, DMX (Via Remote Driver) Colorchange : DMX (Via Remote Driver)
Weight (kg)	0.15 kg/m


SLX71




SLX71-RGB/RGBW




LED STRIP LIGHT

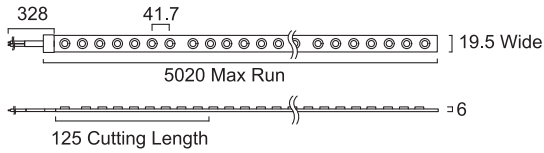


Attention




1. Top bending Series
Correct bending way




2. Top bending Series
Correct bending way

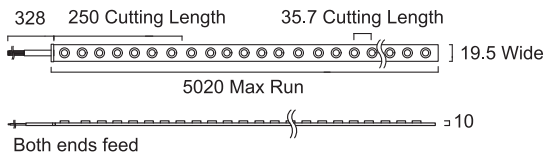

Attention



1. Top bending Series
Correct bending way



2. Top bending Series
Correct bending way


SLX71

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
18W/m	2700K (1680lm/m)	15°	24Vdc
	3000K (1780lm/m)	30°	
	4000K (1820lm/m)	45°	
	6500K (1860lm/m)	60°	
		20°x 45°	


SLX71-RGB / RGBW

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
19.2W/m	RGB (678lm/m)	30°	24Vdc
24W/m	RGBW (1248lm/m)	60°	
		25°x 45°	

Accessories



Stainless Steel
Mounting Clips








Aluminium profile
w = 21.9mm h= 10.9mm L= 1000mm




LED STRIP LIGHT



SLX71-18W



SLX71-19.2W



SLX71-24W

