

LED IP Recessed Downlight



TIS RFL74D

Application





Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification


Housing	Die-cast aluminium
Finishing	Powder coated in white
Diffuser	Clear glass
Mounting	Recessed
Power	14/20W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	14W : 1333/1397/1530 lm 20W : 2232/2430/2538 lm
Luminaire Output	14W : 1015/1063/1164 lm* 20W : 1736/1876/1945 lm*
Beam Angle	14W : 15/24/36/60 Degree 20W : 18/24/36/60 Degree
Control Gear	Separate driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	II
IP Rating	44
Luminaire Lifetime	25,000 hrs.
Remarks	*Value at 36 Degree *

Ordering Data

Model	Watt
RFL74D/WH-14LED	14W
RFL74D/WH-20LED	20W

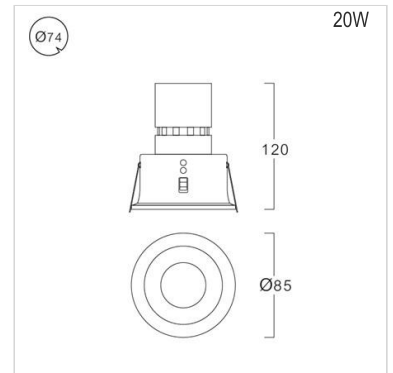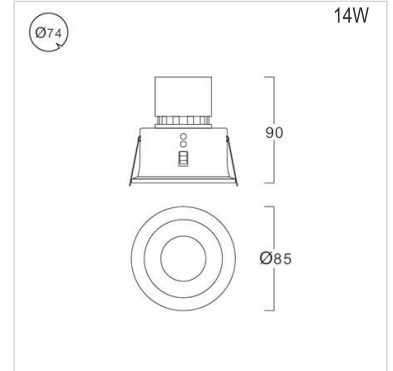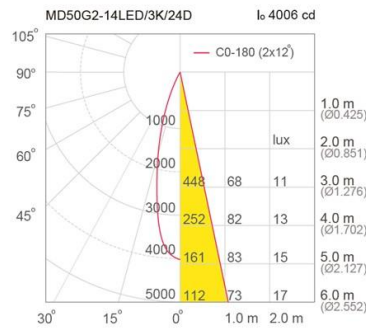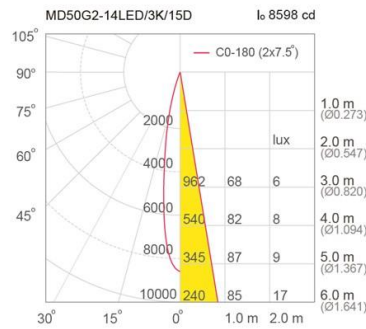

Related Products



Honey comb



RAL83-14W



RFL83-14W



RAL80-14W

