

LED Recessed Downlight



TIS ERDL150

Application


Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification

Housing	High purity Aluminium die-formed
Finishing	Powder coated in white
Diffuser	Polycarbonate (PC)
Mounting	Recessed
Power	14/20W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	14W : 1540/1660/1805 lm 20W : 2200/2370/2575lm
Luminaire Output	14W : 1361/1470/1592 lm 20W : 1860/2008/2176 lm
Beam Angle	98 degree
Control Gear	Separate driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
Luminaire Lifetime	40,000 hrs.
Equivalent	14W : CFL 32W 20W : CFL 2x18W

Ordering Data

Model	Watt
ERDL150/WH-14LED	14W
ERDL150/WH-20LED	20W

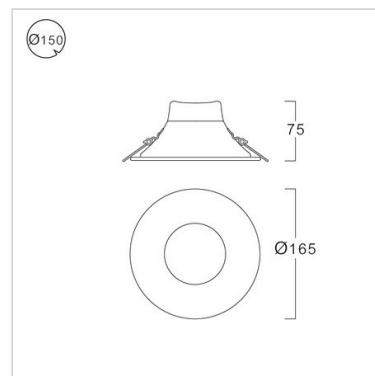

Related Products



ERDL100-10/14W



ERDL200-23/27W

