


LED
STRIP
LIGHT



SPX01

Material	LED mounted on flexible PCB in silicone jacket
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 40°C
IP Rating	20, 65
CRI	≥ 80
Min.Cutting Unit	100mm
Max. Continuous Length	5m
Factory Supplied Cable	5C x 0.3 mm², L = 0.35m
Control Options	DMX
Address per meter	10
Weight (kg)	0.1 kg/m



MONO
CHROME


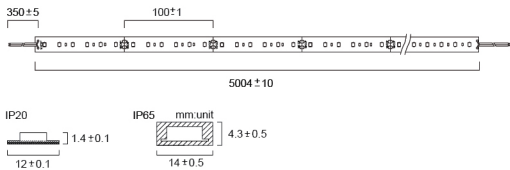
RGBW

IP20

IP65

24
VDC

DMX
512



SPX01













Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
15W/m	3000K (1275lm/m)	110°	24Vdc
	4000K (1275lm/m)		
	6500K (1275lm/m)		
	RGBW (700lm/m)		



ALUMINIUM PROFILE FOR LED STRIP LIGHT

Model	Picture	Drawing (not to scale)
ALS1506		
ALS1202		
ALS0915		
ALS1612		
ALS1707		
ALS2310		
ALS2507		

ALUMINIUM PROFILE FOR LED STRIP LIGHT

Model	Picture	Drawing (not to scale)
ALS1616		
ALS2016A		
ALS2016B		
ALS1715		
ALS1806		
ALS1713-60D		
ALS3514	