

LED Recessed Downlight



TIS RFL60D

Application






Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification

Housing	Die-cast aluminium
Finishing	Powder coated in white / black
Mounting	Recessed
Power	8W
Light Source	LED-COB
Colour Temperature	2700/3000/3500/4000K
CRI	90
LED Output	760/800/825/845 lm
Luminaire Output	579/610/629/645 lm*
Beam Angle	24/30/36/50 Degree
Control Gear	Separate driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	II
IP Rating	44
Luminaire Lifetime	25,000 hrs.
Equivalent	MR11 20W
Remarks	*Value at 24 Degree

Ordering Data

Model	Watt
RFL60D/WH-8LED	8W
RFL60D/BK-8LED	8W

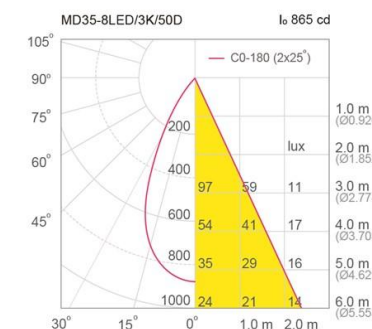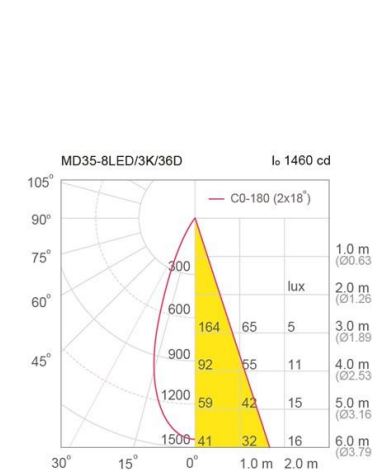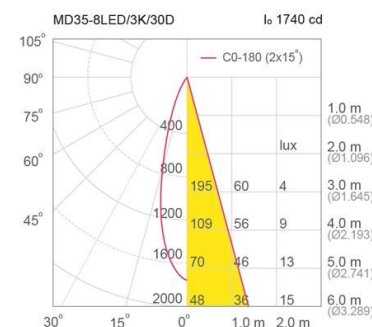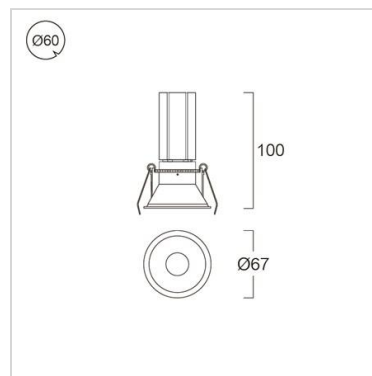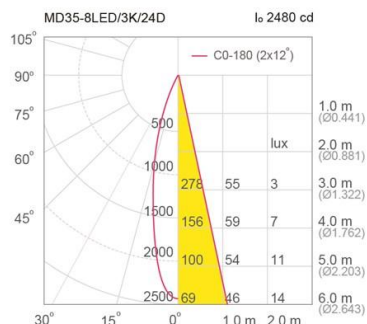

Related Products



RAL49D/WH-8W



RFL49D/WH-8W



RAL58/WH-8W



RSAL58/WH-8W