

LED Inground



 TIS INL200

Application


Inground luminaire is designed to accent or highlight trees,walls,columns,signboards,etc.

Specification


| | |
|---------------------------|---|
| Housing | Die-cast aluminium body with grade 304 stainless steel flange |
| Finishing | Matt finished |
| Lens | Clear toughened glass |
| Gasket | Silicone rubber |
| Cable Entry | M12 nickel brass cable gland |
| Dimension | Dia.110x104 mm. |
| Cut Out | Dia.102 mm. |
| Mounting | Recessed in block out made of aluminium |
| Power | 5W |
| Light Source | LED Module |
| Colour Temperature | 3000K |
| Luminaire Output | 350 lm |
| Beam Angle | 25/40 degree |
| Control Gear | Separate driver |
| Power Supply | 220-240VAC,50Hz |
| Insulation Class | III |
| IP Rating | 67 |
| Luminaire Lifetime | 30,000 hrs. |
| Equivalent | MR16 35W |

Ordering Data

| Model | Watt |
|-------------|------|
| INL200-5LED | 5W |

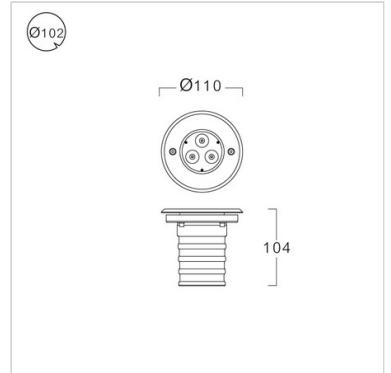

Related Products



Honey comb