

LED
NEON FLEX



SLN260 / SLN261 / SLN264 (Onsen)

Material : LED mounted on flexible PCB in silicone jacket

Driver : Remote 24Vdc constant voltage driver.

Life Time : 50,000 hours, L70 @ 25°C

Ambient Temperature : up to 45°C

IP Rating : 68

CRI: ≥ 80

Min. Cutting Unite :

83.33mm (SLN260,SLN264), 55.6mm (SLN261)



Max. Continuous Length : 20m

Factory Supplied Cable :


2C x 0.75 mm², L = 3m

Control via external driver : 1-10V, DALI, DMX

Weight (kg): 0.5 kg/m

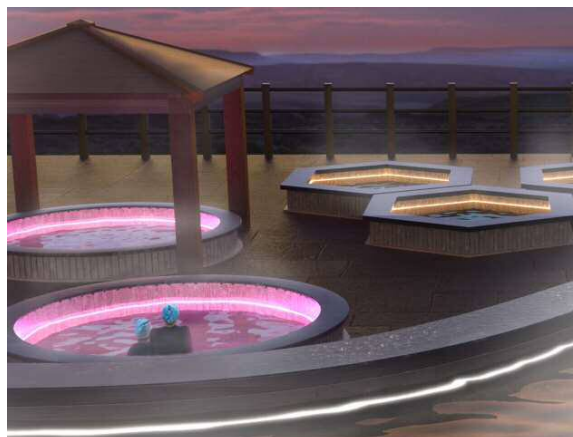


Model	Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
SLN260-HB	6W/m	2700K (210lm/m) 3000K (210lm/m) 4000K (210lm/m) 5700K (210lm/m)	120°	24Vdc



SLN261-VB	6W/m	2700K (350lm/m) 3000K (350lm/m) 4000K (350lm/m) 5700K (350lm/m)	120°	24Vdc
-----------	------	--	------	-------

SLN261-HB	6W/m	2700K (260lm/m) 3000K (260lm/m) 4000K (260lm/m) 5700K (260lm/m)	120°	24Vdc
-----------	------	--	------	-------



SLN264-HB	6W/m	2700K (280lm/m) 3000K (280lm/m) 4000K (280lm/m) 5700K (280lm/m)	120°	24Vdc
-----------	------	--	------	-------

Injection-Moulded connector [E/S/B] + End cap



E = END



S = Side



B = Button



End Cap