

# LED Recessed Downlight

L&E

 TIS ERDL200


## Application

Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.



## Specification

<b>Housing</b>	High purity Aluminium die-formed
<b>Finishing</b>	Powder coated in white
<b>Diffuser</b>	Polycarbonate (PC)
<b>Mounting</b>	Recessed
<b>Power</b>	23/27W
<b>Light Source</b>	LED-COB
<b>Colour Temperature</b>	3000/4000/5000K
<b>CRI</b>	>90/ >90/ >80
<b>Lamp Output</b>	23W : 2635/2845/3090 lm 27W : 3065/3300/3515 lm
<b>Luminaire Output</b>	23W : 2198/2373/2571 lm 27W : 2462/2658/2880 lm
<b>Beam Angle</b>	98 degree
<b>Control Gear</b>	Separate driver
<b>Power Supply</b>	220-240VAC, 50Hz
<b>Power Factor</b>	>0.9
<b>Insulation Class</b>	I
<b>IP Rating</b>	20
<b>Luminaire Lifetime</b>	40,000 hrs.
<b>Equivalent</b>	23W:CFL 2x26W 27W:CFL 2x32W

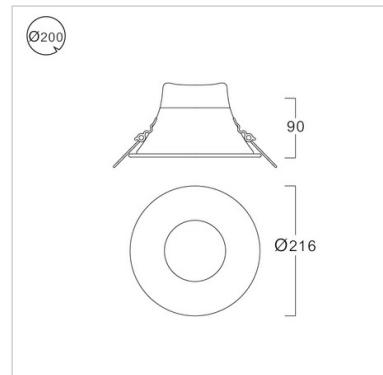

## Ordering Data

Model	Watt
ERDL200/WH-23LED	23W
ERDL200/WH-27LED	27W

## Related Products

