





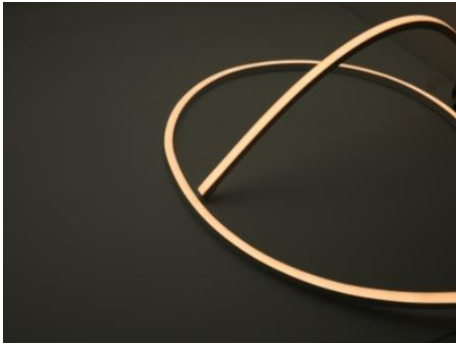

Material	LED mounted on flexible PCB in silicone jacket
Driver	Remote 24Vdc constant voltage driver.
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-40°C ~ 55 °C
IP Rating	67
CRI	≥ 80
Min. Cutting Unite	14.28mm
Max. Continuous Length	6m
Control via external driver	On-off, Triac, 0-10V, DALI, DMX
Weight (kg)	0.23 kg/m




Model	Watt (W)	CCT (K)	Lumen (lm)	Beam Angle (°)	Input (V)
SLN267-VB	9 W/m	2700K	480 lm	120°	24Vdc
		3000K	480 lm		
		3500K	480 lm		
		4000K	480 lm		
		5700K	480 lm		



Model	Watt (W)	CCT (K)	Lumen (lm)	Beam Angle (°)	Input (V)
SLN267-HB	9 W/m	2700K	420 lm	120°	24Vdc
		3000K	420 lm		
		3500K	420 lm		
		4000K	420 lm		
		5700K	420 lm		

Accessories

Injection-Moulded connector (E/S/B) + End cap



E = END



S = Side



B = Button



End Cap

Aluminum Profile

Serrated Aluminum Profile



Dimension

