

LED LINEAR FLOOD




LF015

Material	Extrusion aluminium body, die – casting aluminium end cap, toughened front glass
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 50°C
IP Rating	66
CRI	≥ 80
Control Options	Monochrome : DMX Colorchange : DMX Dynamic White : DMX
Address per meter	1
Weight (kg)	3.5 kg/m




Black



LF015

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
21W (300mm)	2700K (6050lm/m)	15°	24Vdc
35W (500mm)	3000K (6300lm/m)	30°	
70W (1000mm)	4000K (6500lm/m)	45°	
	5700K (6650lm/m)	15° x 60°	
	RGBW (4235lm/m)	20° x 40°	
	Dynamic white		
	2200K-6500K (5845lm/m)		

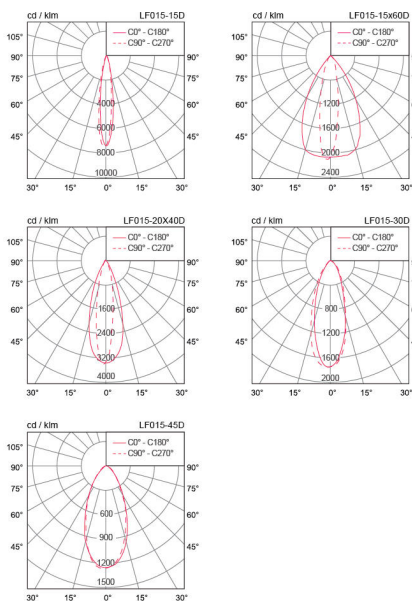

Accessories



Feeder Cable L = 350 mm