

LED Pendant



TIS LPLP105/CT

Application


Pendant luminaire is designed to use for office buildings, book stores, discount stores, shopping centers, convenience stores, residences, hotels, restaurants, hospitals, etc.

Specification


Housing	Extruded aluminium
Finishing	Powder coated in grey, white or black
Diffuser	Acrylic (PMMA)
Mounting	Suspension wire
Power	2S : 14-18W (2 lamps) 2L : 28-32W (2 lamps)
Light Source	LED-T8
Lamp Holder	G13
Colour Temperature	3000/4000/6500K
Lamp Output	2S : L&E : 2x7/8/9W : 2x1050 lm 2L : L&E : 2x14/16W : 2x2100 lm
Luminaire Output	2S : 14/16/18W : 1260 lm 2L : 28/32W : 2520 lm
Power Supply	220-240VAC, 50Hz
Insulation Class	I
IP Rating	20
LED Lifetime	L&E : 25,000/40,000/50,000 hrs.
Equivalent	14-18W : T5 2x14W/T8 2x18W 28-32W : T5 2x28W/T8 2x36W
Remarks	Option 1.Box with Transparent Wire 1.5m

Ordering Data


Model	Watt
LPLP105/2S/CT-XXLED-T8	14-18W
LPLP105/2L/CT-XXLED-T8	28-32W

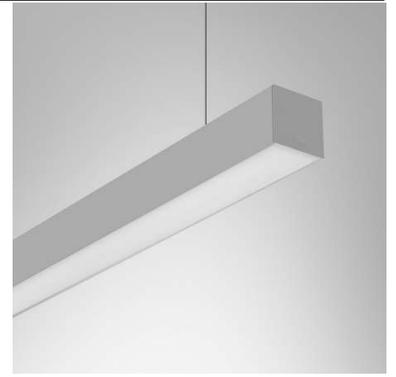

LPLP105/2S



LPLP105/2L



Related Products

