

LED Emergency / Exit Sign



TIS ESL4

Application


This luminaire is designed to use for safety reason in case of emergency situation.

Specification

| | |
|------------------|--|
| Housing | Die-formed cold rolled steel |
| Finishing | Powder coated in white |
| Charger | Fully automatic solid stage with constant voltage and limit current charging |
| Battery | Lithium Iron Phosphate, 3.2V 2.7Ah |
| Dimension | 375x58x247 mm. |
| Mounting | Surface ceiling mount |
| Safety | Low-high voltage cut-off to protect under discharge, over charge of battery. AC/DC fuse is well prepared to protect input and output short circuit |
| Power | 10W |
| Light Source | LED Module |
| Power Supply | 220-240VAC,50Hz |
| Power Factor | > 0.65 |
| Insulation Class | I |
| IP Rating | 20 |
| Equivalent | T8 10W |
| Remarks | 3 Hrs. Back-up time |

Ordering Data

| Model | Watt |
|--------------|------|
| ESL4/D-10LED | 10W |
| ESL4/S-10LED | 10W |

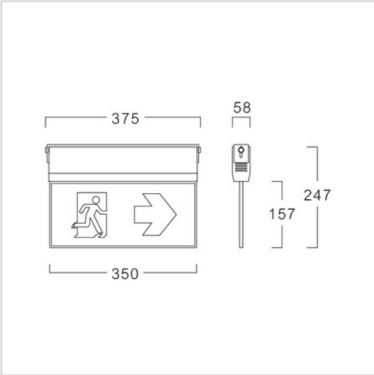

Face design

| | | | |
|-------|-------|-------|-------|
| | | | |
| EF 01 | EF 02 | EF 03 | EF 04 |
| | | | |
| EF 05 | EF 06 | EF 07 | EF 09 |