

LED Accent



TIS **GSL132**

Application


Accent Luminaire is designed for a wide variety of architectural and landscape applications to accent or highlight specific architectural and landscape features, etc.

Specification


| | |
|--------------------|---------------------------------|
| Housing | Die-cast aluminium |
| Finishing | Powder coated in black |
| Lens | Clear toughened glass |
| Gasket | Silicone rubber |
| Dimension | 72x96x106 mm. |
| Mounting | Ground spike |
| Power | 12W |
| Light Source | LED-COB |
| Colour Temperature | 3000K |
| Luminaire Output | 1100 lm |
| Beam Angle | 15/30/50 degree |
| Control Gear | Separate switching power supply |
| Power Supply | 220-240VAC,50Hz |
| Insulation Class | III |
| IP Rating | 66 |
| Luminaire Lifetime | 50,000 hrs. |
| Equivalent | PAR30 100W |

Ordering Data

| Model | Watt |
|--------------|------|
| GSL132-12LED | 12W |

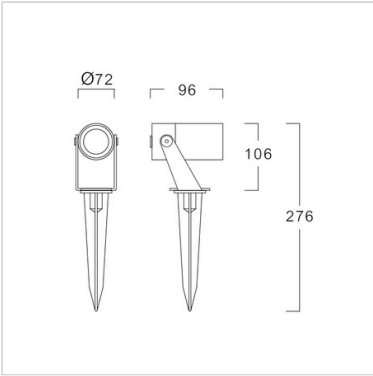

Related Products



Honey comb



Tree strap

