

LED Surface Linear



TIS LSLP105/CT

Application


This luminaire is designed to use for office buildings, schools, storage areas, hospitals, and other working areas where is required highly uniformity illumination, etc.

Specification


Housing	Extruded aluminium
Finishing	Powder coated in grey, white or black
Diffuser	Acrylic (PMMA)
Mounting	Surface
Power	2S : 14-18W (2 lamps) 2L : 28-32W (2 lamps)
Light Source	LED-T8
Lamp Holder	G13
Colour Temperature	3000/4000/6500K
Lamp Output	2S : L&E : 2x7/8/9W : 2x1050 lm 2L : L&E : 2x14/16W : 2x2100 lm
Luminaire Output	2S : 14/16/18W : 1260 lm 2L : 28/32W : 2520 lm
Power Supply	220-240VAC, 50Hz
Insulation Class	I
IP Rating	20
LED Lifetime	L&E : 25,000/40,000/50,000 hrs.
Equivalent	14-18W : T5 2x14W/T8 2x18W 28-32W : T5 2x28W/T8 2x36W

Ordering Data


Model	Watt
LSLP105/2S/CT-XXLED-T8	14-18W
LSLP105/2L/CT-XXLED-T8	28-32W

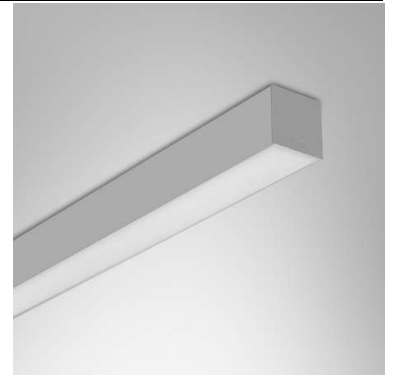

LSLP105/2S



LSLP105/2L



Related Products



LSLP105/WH



LSLP105/BK



LED-T8

