

TIS ERDL168A

Application


Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification

Housing	Die-cast Aluminium
Finishing	Powder coated in white
Diffuser	Opal
Mounting	Recessed
Power	23/30W
Light Source	LED-MODULE
Colour Temperature	3000/4000/5000K
Lamp Output	23W : 2570/2786/3045 lm 30W : 3427/3715/4060 lm
Luminaire Output	23W : 2325/2500/2675 lm 30W : 2980/3200/3425 lm
Beam Angle	90 degree
Control Gear	Separate driver
Power Supply	220VAC 50Hz
IP Rating	20
Luminaire Lifetime	40,000 hrs.

Ordering Data

Model	Watt
ERDL168A/WH-23LED	23W
ERDL168A/WH-30LED	30W

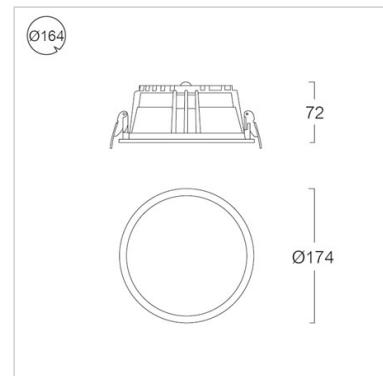

Related Products



ERDL168B-23/30W



ERDL168C-23/30W

