



LED

MODULE BACKLIGHTING

SLM02 is luminaires easy and uniform positioning of the LED modules. Suitable for channel letter, black and white board. High luminous efficacy and full encapsulation of the LED modules for durable use in outdoor signage applications.

Material :

ABS Plastic and PC lens

Finishing :

White color

Driver :

Remote 12 Vdc constant voltage driver

Max. continuous connection : 30 module

Life Time : 50,000 hrs, L70 @ 25°C

Ambient Temperature : -25°C ~ 60°C

IP Rating : 68




Ra : ≥ 70

Factory Supplied Cable : 2 × 0.5 mm², L = 0.2 m

Control : On-off, 0-10V, DALI

Weight (kg) : 0.01Kg per module



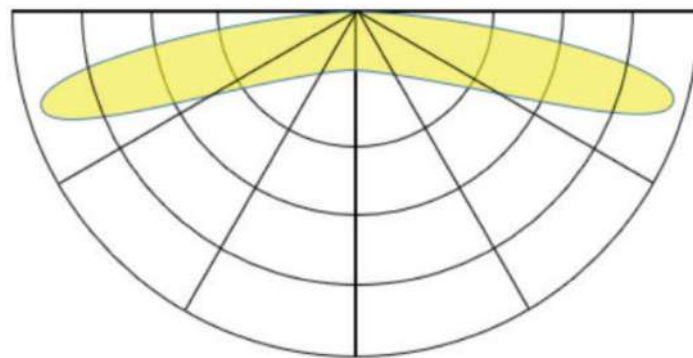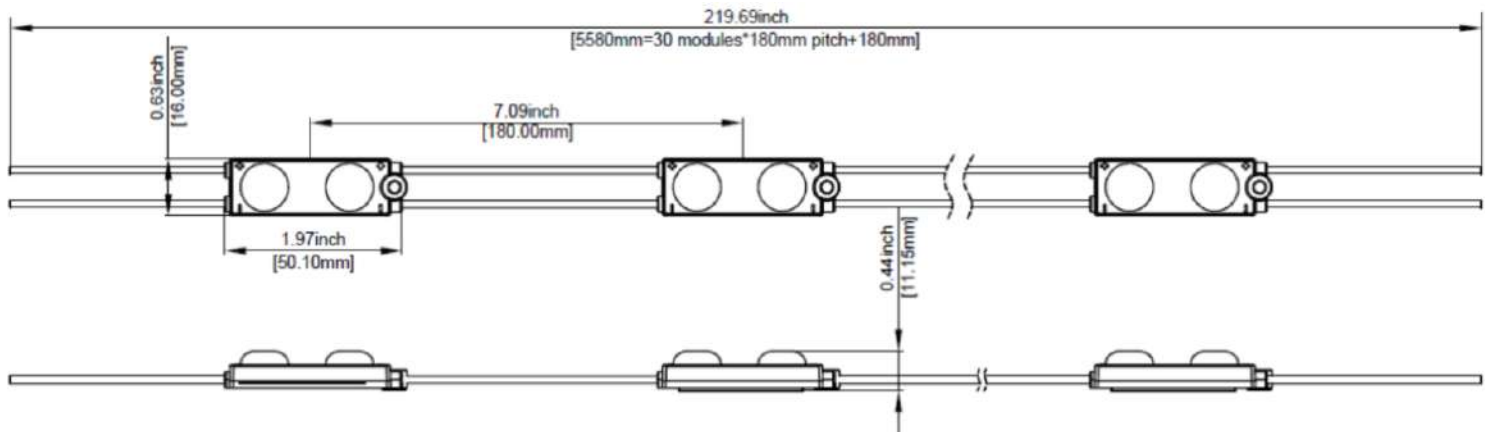

Beam Angle: 175°

Model	Watt	CCT. (K)	Beam Angle	Color	Input(V)
SLM02	0.72W	3000K(101lm)	175°	White	12Vdc
		4000K(101lm)			
		5000K(108lm)			
		6500K(108lm)			
		8000K(108lm)			