


FRAME

Outline of geometric form makes FRAME become the minimalist solution, keeping simple and easily getting along with surroundings.

±	TIS	IP65	CRI90	IK06	50,000 hrs. Lifetime
---	-----	------	-------	------	-------------------------



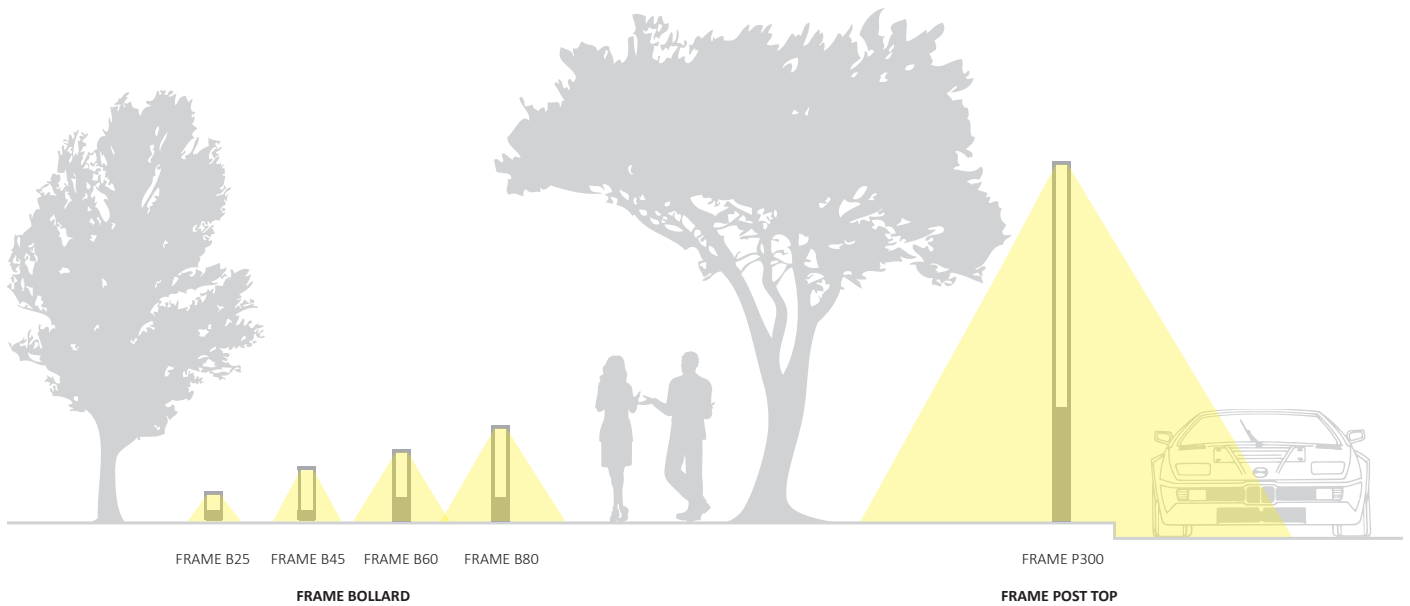


FRAME SERIES is available in various heights and power to ensure a solution for every landscape and outdoor applications.

Technical Features



Die-cast aluminium housing and extruded aluminium structure with high corrosion resistance
 LED-COB with CRI90
 Silicone rubber gaskets
 Stainless steel screws
 Polyester powder coated
 Integral driver

Available Colors


	Matt graphite RAL7043
	Matt grey RAL9006

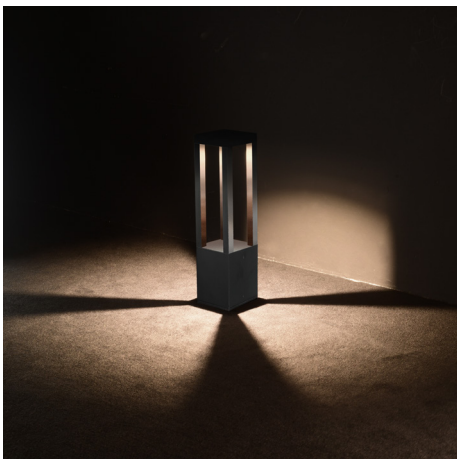


FRAME BOLLARD




MODEL	WATT	LUMINAIRE LUMINOUS FLUX	LUMINAIRE COLOR
FRAME B25	3	3K 60 lm	Graphite
		4K 65 lm	Grey
	6	3K 210 lm	
		4K 230 lm	



MODEL	WATT	LUMINAIRE LUMINOUS FLUX	LUMINAIRE COLOR
FRAME B45	3	3K 90 lm	Graphite
		4K 100 lm	Grey
	6	3K 300 lm	
		4K 330 lm	




MODEL	WATT	LUMINAIRE LUMINOUS FLUX	LUMINAIRE COLOR
FRAME B60	3	3K 260 lm	Graphite
		4K 285 lm	Grey
	6	3K 450 lm	
		4K 500 lm	




MODEL	WATT	LUMINAIRE LUMINOUS FLUX	LUMINAIRE COLOR
FRAME B80	3	3K 300 lm	Graphite
		4K 330 lm	Grey
	6	3K 510 lm	
		4K 560 lm	

INSTALLATION ACCESSORIES



MOUNTING BASE with size M10 electro galvanized screws for frame bollard **B25** and **B45** to be installed on the concrete floor




MOUNTING BASE with size M12 electro galvanized screws for frame bollard **B60** and **B80** to be installed on the concrete floor



GROUND SPIKE for frame bollard to be installed in the ground


* Other Luminaire colors and color temperatures are available upon request.

FRAME POST TOP



MODEL	WATT	LUMINAIRE LUMINOUS FLUX	LUMINAIRE COLOR
FRAME P300	10	3K 300 lm	Graphite
		4K 330 lm	Grey
	20	3K 600 lm	
		4K 660 lm	



INSTALLATION ACCESSORIES





MOUNTING BASE with size M10
hot-dip galvanized bolts for frame
post top **P300** to be installed
on the concrete foundation

PHOTOMETRIC DATA



FRAME B25

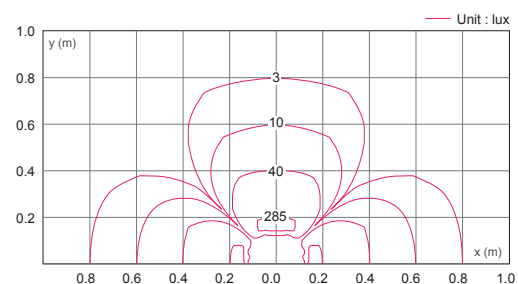



FRAME B45

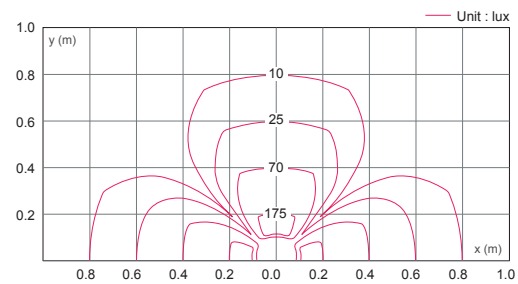

FRAME B60

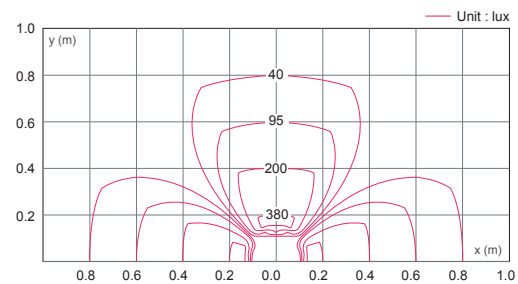

FRAME B80

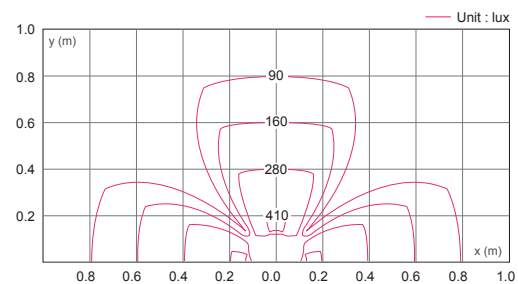

FRAME P300

